

# TEST REPORT

Report No.: BCTC2409324172-5E

---

Applicant: Radxa Computer (Shenzhen) Co.,Ltd.

---

Product Name: Radxa ROCK 5B+

---

Test Model: Radxa ROCK 5B+ D16E0

---

Tested Date: 2024-09-20 to 2024-10-10

---

Issued Date: 2024-10-17

---

**Shenzhen BCTC Testing Co., Ltd.**



Product Name: Radxa ROCK 5B+

Trademark: 

Model/Type reference: Radxa ROCK 5B+ D16E0  
Radxa ROCK 5B+ D4E0, Radxa ROCK 5B+ D8E0, Radxa ROCK 5B+ D24E0,  
Radxa ROCK 5B+ D32E0, Radxa ROCK 5B+ D4E16, Radxa ROCK 5B+ D8E32,  
Radxa ROCK 5B+ D16E64, Radxa ROCK 5B+ D24E128,  
Radxa ROCK 5B+ D32E256

Prepared For: Radxa Computer (Shenzhen) Co.,Ltd.

Address: 1602, Smart Valley, tiezai Road, Gongle community, Xixiang, Baoan, Shenzhen

Manufacturer: Radxa Computer (Shenzhen) Co.,Ltd.

Address: 1602, Smart Valley, tiezai Road, Gongle community, Xixiang, Baoan, Shenzhen

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road,  
Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2024-09-20

Sample tested Date: 2024-09-20 to 2024-10-10

Issue Date: 2024-10-17


Report No.: BCTC2409324172-5E

Test Standards: ETSI EN 300 328 V2.2.2 (2019-07)

Test Results: PASS

Remark: This is WIFI-2.4GHz band radio test report.

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.


## Table Of Content

Test Report Declaration	Page
1. Version .....	5
2. Test Summary .....	6
3. Measurement Uncertainty .....	7
4. Product Information And Test Setup .....	8
4.1 Product Information .....	8
4.2 Test Setup Configuration .....	8
4.3 Support Equipment .....	9
4.4 Channel List .....	9
4.5 Test Mode .....	9
4.6 Test Environment .....	9
5. Test Facility And Test Instrument Used .....	10
5.1 Test Facility .....	10
5.2 Test Instrument Used .....	10
6. Information As Required .....	11
7. RF Output Power .....	14
7.1 Block Diagram Of Test Setup .....	14
7.2 Limit .....	14
7.3 Test Procedure .....	14
7.4 Test Result .....	16
8. Power Spectral Density .....	19
8.1 Block Diagram Of Test Setup .....	19
8.2 Limit .....	19
8.3 Test Procedure .....	19
8.4 Test Result .....	20
9. Adaptivity .....	23
9.1 Block Diagram Of Test Setup .....	23
9.2 Limit .....	23
9.3 Test Procedure .....	24
9.4 Test Result .....	25
10. Occupied Channel Bandwidth .....	26
10.1 Block Diagram Of Test Setup .....	26
10.2 Limit .....	26
10.3 Test Procedure .....	26
10.4 Test Result .....	27
11. Transmitter Unwanted Emissions In The Out-Of-Band Domain .....	35
11.1 Block Diagram Of Test Setup .....	35
11.2 Limit .....	35
11.3 Test Procedure .....	35
11.4 Test Result .....	37
12. Transmitter Unwanted Emissions In The Spurious Domain .....	43
12.1 Block Diagram Of Test Setup .....	43
12.2 Limits .....	44
12.3 Test Procedure .....	44

12.4	Test Results .....	45
13.	Receiver Spurious Emissions.....	46
13.1	Block Diagram Of Test Setup.....	46
13.2	Limits.....	47
13.3	Test Procedure .....	47
13.4	Test Results .....	48
14.	Receiver Blocking.....	49
14.1	Block Diagram Of Test Setup.....	49
14.2	Limit .....	49
14.3	Test Procedure .....	50
14.4	Test Result.....	50
15.	EUT Photographs.....	51
16.	EUT Test Setup Photographs.....	56


(Note: N/A Means Not Applicable)

TEST  
TC  
OVER  
t Sea

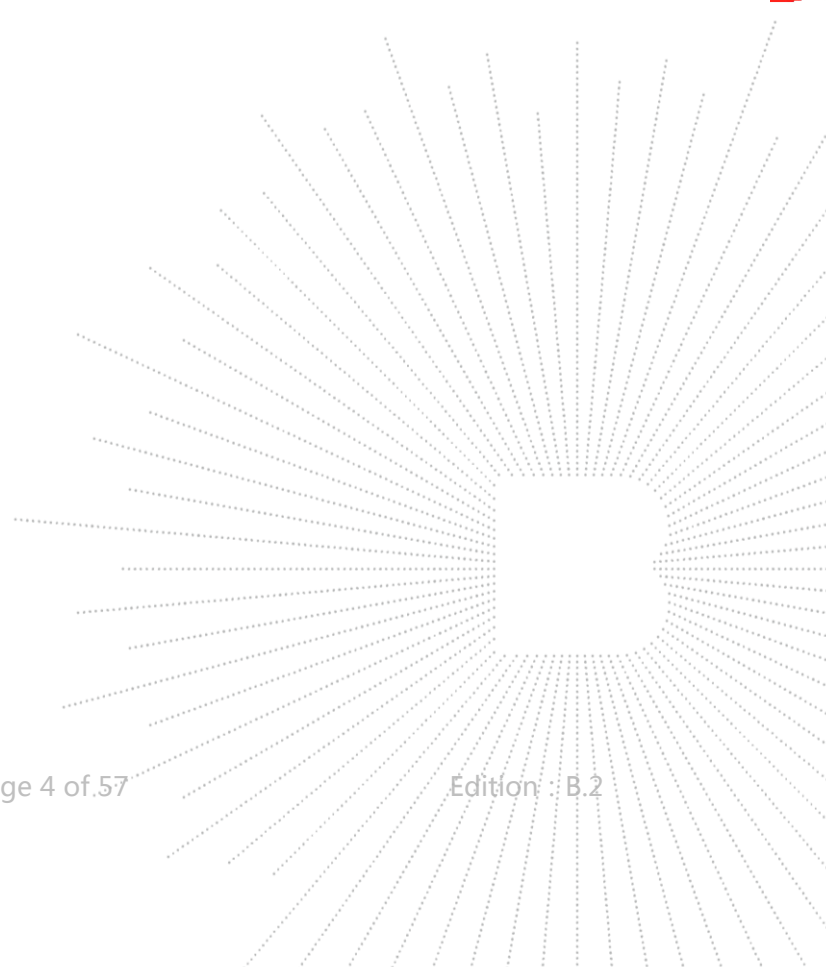

**1. Version**

Report No.	Issue Date	Description	Approved
BCTC2409324172-5E	2024-10-17	Original	Valid

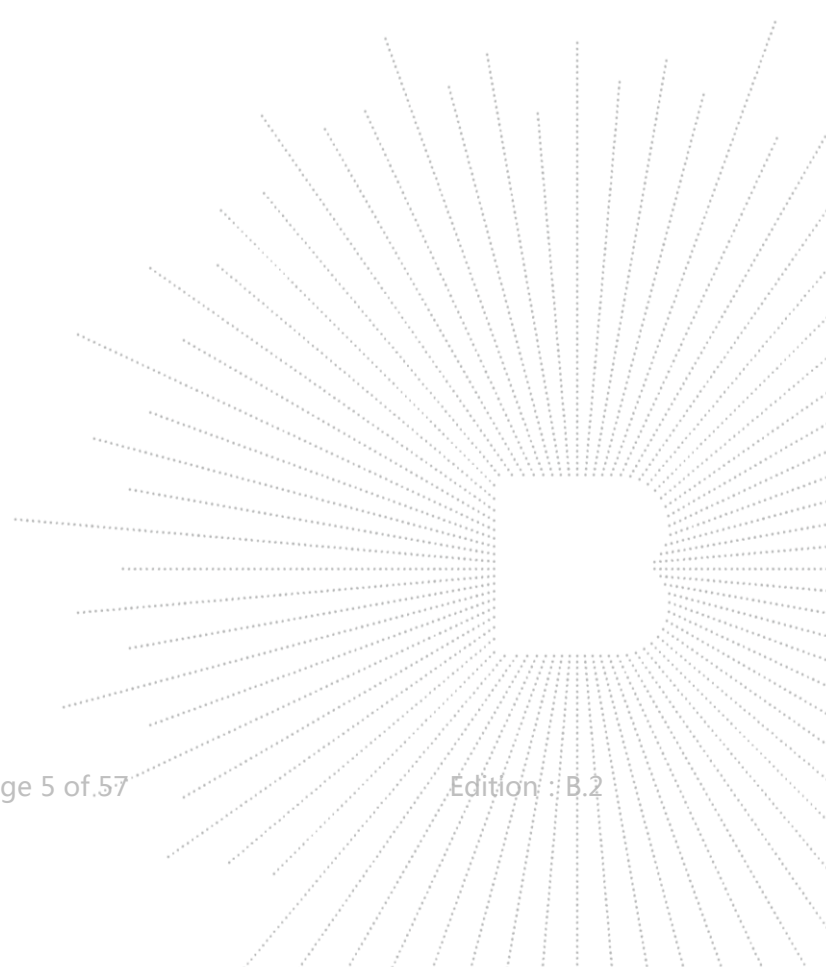

## 2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
<b>Transmitter Parameters</b>			
1	RF output power	4.3.2.2	PASS
2	Power Spectral Density	4.3.2.3	PASS
3	Duty Cycle, Tx-sequence, Tx-gap	4.3.2.4	N/A
4	Medium Utilisation (MU) factor	4.3.2.5	N/A
5	Adaptivity (adaptive equipment using modulations other than FHSS)	4.3.2.6	N/A
6	Occupied Channel Bandwidth	4.3.2.7	PASS
7	Transmitter unwanted emissions in the out-of-band domain	4.3.2.8	PASS
8	Transmitter unwanted emissions in the spurious domain	4.3.2.9	PASS
<b>Receiver Parameters</b>			
9	Receiver spurious emissions	4.3.2.10	PASS
10	Receiver Blocking	4.3.2.11	PASS
11	Geo-location Capability	4.3.2.12	N/A

Remark:

N/A is an abbreviation for Not Applicable and means this test item is not applicable for this device according to the technology characteristic of device.

### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

RF frequency	1 x 10 <sup>-7</sup>
RF power, conducted	± 1.0 dB
Conducted spurious emission (30MHz-1GHz)	1.28 dB
Conducted spurious emission (1GHz-18GHz)	1.576 dB
Radiated Spurious emission (30MHz-1GHz)	4.30 dB
Radiated Spurious emission (1GHz-18GHz)	4.5 dB
Temperature	0.59 °C
Humidity	5.3 %

## 4. Product Information And Test Setup

### 4.1 Product Information

Model/Type reference	Radxa ROCK 5B+ D16E0 Radxa ROCK 5B+ D4E0, Radxa ROCK 5B+ D8E0, Radxa ROCK 5B+ D24E0, Radxa ROCK 5B+ D32E0, Radxa ROCK 5B+ D4E16, Radxa ROCK 5B+ D8E32, Radxa ROCK 5B+ D16E64, Radxa ROCK 5B+ D24E128, Radxa ROCK 5B+ D32E256
Model differences:	All models are the same circuit and RF module, only the model name and memory size are different.
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	WIFI(2.4GHz): IEEE 802.11b/g/n HT20/ ax HT20: 2412MHz-2472MHz IEEE 802.11n HT40/ ax HT40: 2422MHz-2462MHz
Max. RF output power:	WIFI(2.4GHz) : Antenna A: 11.68 dBm, Antenna B: 11.54 dBm, MIMO: 12.97 dBm
Type of Modulation:	WIFI(2.4GHz): DSSS, OFDM, OFDMA
Antenna installation:	WIFI(2.4GHz): FPC antenna WIFI(2.4GHz): Antenna A: 2.1 dBi, Antenna B: 2.1 dBi
Antenna Gain:	Remark: <input checked="" type="checkbox"/> The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. <input type="checkbox"/> The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Ratings:	DC 12V from adapter

Cable of Product

No.	Cable Type	Quantity	Provider	Length (m)	Shielded	Note
1	--	--	Applicant	---	Yes/No	With a ferrite ring in mid Detachable
2	--	--	BCTC	--	Yes/No	--

### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.



### 4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
1.	Adapter	HP	TPN-LA22	---	---
2.	keyboard	Logitech	1641MG01DLZ8	---	---
3.	Mouse	Logitech	M-U0026	---	---
4.	Earphone	IHIP	SBGE1	---	---
5.	U disk	SanDisk	32G	---	---
6.	Router	HUAWEI	WS318	---	---
7.	HDMI Cable	Belkin	HDMI2.0	---	---
8.	Display	ChangHong	55DBK	---	---
9.	PC	Lenovo	TP00117D	---	---

#### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	2467
13	2472						

### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20/ax20)	2412MHz	2442MHz	2472MHz
Transmitting(802.11n40/ax40)	2422MHz	2442MHz	2462MHz
Receiving(802.11b/g/n20/ax20)	2412MHz	2442MHz	2472MHz
Receiving(802.11 n40/ax40)	2422MHz	2442MHz	2462MHz

### 4.6 Test Environment

#### 1. Normal Test Conditions:

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Temperature(°C):	26
Test Voltage(DC):	12V

#### 2. Extreme Test Conditions:

For tests at extreme temperatures, measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer.

Test Conditions	LT	HT
Temperature (°C)	0	35

## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
2	Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
3	Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
4	Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
5	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	942	May 21, 2024	May 20, 2025
6	Loop Antenna	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
7	Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 16, 2024	May 15, 2025
8	Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
9	Preamplifier	MITEQ	TTA1840-35- HG	2034381	May 16, 2024	May 15, 2025
10	Horn antenna	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
11	Spectrum Analyzer 9kHz-40GHz	R&S	FSP 40	100363	May 16, 2024	May 15, 2025
12	Software	Frad	EZ-EMC	FA-03A2 RE	\	\
13	Spectrum Analyzer	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
14	Signal Generator	Keysight	N5182B	MY56200519	May 16, 2024	May 15, 2025
15	Signal Generator	Keysight	83711B	US37100131	May 16, 2024	May 15, 2025
16	Communication test set	R&S	CMW500	126173	Nov. 13. 2023	Nov. 12, 2024
17	D.C. Power Supply	LongWei	TPR-6405D	\	Nov. 13. 2023	Nov. 12, 2024
18	Programmable constant temperature and humidity test chamber	DGBELL	BTKS5-150C	\	Jul. 01, 2023	Jun. 30, 2025
19	Radio frequency control box	MAIWEI	MW100-RFC B	\	\	\
20	Software	MAIWEI	MTS 8310	\	\	\

## 6. Information As Required

### ETSI EN 300 328 V2.1.1 Annex E

<b>a) The type of modulation used by the equipment:</b>
<input type="checkbox"/> FHSS
<input checked="" type="checkbox"/> other forms of modulation
<b>b) In case of FHSS modulation:</b>
<input type="checkbox"/> In case of non-Adaptive Frequency Hopping equipment: The number of Hopping Frequencies: _
<input type="checkbox"/> In case of Adaptive Frequency Hopping Equipment: The maximum number of Hopping Frequencies: _ The minimum number of Hopping Frequencies: _
<input type="checkbox"/> The (average) Dwell Time: _____ maximum
<b>c) Adaptive / non-adaptive equipment:</b>
<input type="checkbox"/> non-adaptive Equipment
<input checked="" type="checkbox"/> adaptive Equipment without the possibility to switch to a non-adaptive mode
<input type="checkbox"/> adaptive Equipment which can also operate in a non-adaptive mode
<b>d) In case of adaptive equipment:</b>
The Channel Occupancy Time implemented by the equipment: _
<input type="checkbox"/> The equipment has implemented an LBT based DAA mechanism
<input type="checkbox"/> In case of equipment using modulation different from FHSS:
<input type="checkbox"/> The equipment is Frame Based equipment
<input checked="" type="checkbox"/> The equipment is Load Based equipment
<input type="checkbox"/> The equipment can switch dynamically between Frame Based and Load Based equipment
The CCA time implemented by the equipment: ..... $\mu$ s
<input type="checkbox"/> The equipment has implemented an non-LBT based DAA mechanism
<input type="checkbox"/> The equipment can operate in more than one adaptive mode
<b>e) In case of non-adaptive Equipment:</b>
The maximum RF Output Power (e.i.r.p.): _
The maximum (corresponding) Duty Cycle:
Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared): .....
<b>f) The worst case operational mode for each of the following tests:</b>
<input checked="" type="checkbox"/> RF Output Power: 802.11b
<input checked="" type="checkbox"/> Power Spectral Density: 802.11b
<input type="checkbox"/> Duty cycle, Tx-Sequence, Tx-gap
<input type="checkbox"/> Accumulated Transmit time, Frequency Occupation & Hopping Sequence (only for FHSS equipment):
<input type="checkbox"/> Hopping Frequency Separation (only for FHSS equipment):
<input type="checkbox"/> Medium Utilization:
<input type="checkbox"/> Adaptivity:
<input checked="" type="checkbox"/> Nominal Channel Bandwidth: 802.11n (HT40)
<input checked="" type="checkbox"/> Transmitter unwanted emissions in the OOB domain: 802.11g
<input checked="" type="checkbox"/> Transmitter unwanted emissions in the spurious domain: 802.11b
<input checked="" type="checkbox"/> Receiver spurious emissions : 802.11b
<input checked="" type="checkbox"/> Receiver blocking : 802.11b
<b>g) The different transmit operating modes (tick all that apply):</b>
<input type="checkbox"/> Operating mode 1: Single Antenna Equipment
<input type="checkbox"/> Equipment with only one antenna
<input type="checkbox"/> Equipment with two diversity antennas but only one antenna active at any moment in time
<input checked="" type="checkbox"/> Smart Antenna Systems with two or more antennas, but operating in a (legacy) mode where only One antenna is used (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)
<input type="checkbox"/> Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
<input type="checkbox"/> Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)
<input type="checkbox"/> High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1

<input type="checkbox"/> High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2																				
NOTE 1: Add more lines if more channel bandwidths are supported.																				
<input type="checkbox"/> Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming																				
<input type="checkbox"/> Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)																				
<input type="checkbox"/> High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1																				
<input type="checkbox"/> High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2																				
NOTE 2: Add more lines if more channel bandwidths are supported.																				
<b>h) In case of Smart Antenna Systems:</b>																				
The number of Receive chains:																				
The number of Transmit chains:																				
<input type="checkbox"/> symmetrical power distribution																				
<input type="checkbox"/> asymmetrical power distribution																				
In case of beam forming, the maximum (additional) beam forming gain:																				
NOTE: The additional beam forming gain does not include the basic gain of a single antenna.																				
<b>i) Operating Frequency Range(s) of the equipment:</b>																				
Operating Frequency Range 1: Refer to section 4.1																				
Operating Frequency Range 2: _____																				
NOTE: Add more lines if more Frequency Ranges are supported.																				
<b>j) Nominal Channel Bandwidth(s):</b>																				
Nominal Channel Bandwidth 1: <u>38.022 MHz(802.11ax40) Max.</u>																				
NOTE: Add more lines if more channel bandwidths are supported.																				
<b>k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):</b>																				
<input checked="" type="checkbox"/> Stand-alone																				
<input type="checkbox"/> Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)																				
<input type="checkbox"/> Plug-in radio device (Equipment intended for a variety of host systems)																				
<input type="checkbox"/> Other																				
<b>l) The normal and the extreme operating conditions that apply to the equipment:</b>																				
Refer to section 4.6																				
<b>m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p. levels:</b>																				
Antenna Type:																				
<input checked="" type="checkbox"/> FPC Antenna																				
Antenna Gain: Refer to section 4.1																				
If applicable, additional beamforming gain (excluding basic antenna gain):																				
<input type="checkbox"/> Temporary RF connector provided																				
<input type="checkbox"/> No temporary RF connector provided																				
<input type="checkbox"/> Dedicated Antennas (equipment with antenna connector)																				
<input type="checkbox"/> Single power level with corresponding antenna(s)																				
<input type="checkbox"/> Multiple power settings and corresponding antenna(s)																				
Number of different Power Levels:																				
Power Level 1:																				
Power Level 2:																				
Power Level 3:																				
NOTE 1: Add more lines in case the equipment has more power levels.																				
NOTE 2: These power levels are conducted power levels (at antenna connector).																				
For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable																				
<b>Power Level 1:</b>																				
Number of antenna assemblies provided for this power level:																				
<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th style="width: 25%;">Assembly #</th> <th style="width: 25%;">Gain (dBi)</th> <th style="width: 25%;">e.i.r.p.(dBm)</th> <th style="width: 25%;">Part number or model name</th> </tr> </thead> <tbody> <tr><td>1</td><td></td><td></td><td></td></tr> <tr><td>2</td><td></td><td></td><td></td></tr> <tr><td>3</td><td></td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td></td></tr> </tbody> </table>	Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name	1				2				3				4			
Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name																	
1																				
2																				
3																				
4																				

CO., LTD.

NOTE 3: Add more rows in case more antenna assemblies are supported for this power level.

**Power Level 2:**

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name
1			
2			
3			
4			

NOTE 4: Add more rows in case more antenna assemblies are supported for this power level.

**Power Level 3:**

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name
1			
2			
3			
4			

NOTE 5: Add more rows in case more antenna assemblies are supported for this power level.

**n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:**

Refer to section 4.

**o) Describe the test modes available which can facilitate testing:**

.....

**p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], IEEE 802.15.4™ [i.4], proprietary, etc.):**.....

**q) If applicable, the statistical analysis referred to in clause 5.4.1 q)**

(to be provided as separate attachment)

**r) If applicable, the statistical analysis referred to in clause 5.4.1 r)**

(to be provided as separate attachment)

**s) Geo-location capability supported by the equipment:**

☐ Yes

☐ The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user

☒ No

**t) Describe the minimum performance criteria that apply to the equipment (see clause 4.3.1.12.3 or clause 4.3.2.11.3):**


.....

SHENZHEN



## 7. RF Output Power

### 7.1 Block Diagram Of Test Setup

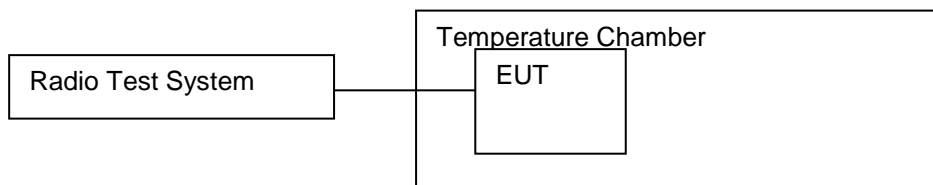

### 7.2 Limit

For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm.

The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. See clause 5.3.1 m). For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier. This limit shall apply for any combination of power level and intended antenna assembly.

Limit
20dBm

### 7.3 Test Procedure

#### Step 1:

- Use a fast power sensor suitable for 2.4 GHz and capable of minimum 1 MS/s.
- Use the following settings:
  - Sample speed 1 MS/s or faster.
  - The samples shall represent the RMS power of the signal.
  - Measurement duration: For non-adaptive equipment: equal to the observation period defined in clause 4.3.1.3.2 or clause 4.3.2.4.2. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured.

NOTE 1: For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.

#### Step 2:

- For conducted measurements on devices with one transmit chain:
  - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.
- For conducted measurements on devices with multiple transmit chains:
  - Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports.
  - Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than 500 ns.
  - For each individual sampling point (time domain), sum the coincident power samples of all ports and store them. Use these summed samples in all following steps.

**Step 3:**

- Find the start and stop times of each burst in the stored measurement samples.

The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2.

NOTE 2: In case of insufficient dynamic range, the value of 30 dB may need to be reduced appropriately.

**Step 4:**

- Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. Save these Pburst values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

**Step 5:**

- The highest of all Pburst values (value "A" in dBm) will be used for maximum e.i.r.p. calculations.

**Step 6:**

- Add the (stated) antenna assembly gain "G" in dBi of the individual antenna.
- If applicable, add the additional beamforming gain "Y" in dB.
- If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used.
- The RF Output Power (P) shall be calculated using the formula below:

$$P = A + G + Y$$

- This value, which shall comply with the limit given in clause 4.3.1.2.3 or clause 4.3.2.2.3, shall be recorded in the test report.

## 7.4 Test Result


Condition	Mode	Frequency (MHz)	Max EIRP (dBm) Ant A	Max EIRP (dBm) Ant B	Total EIRP	Limit (dBm)	Verdict
NVNT	b	2412	11.51	<b>11.54</b>	/	20	Pass
NVNT	b	2442	<b>11.68</b>	11.4	/	20	Pass
NVNT	b	2472	11.55	11.36	/	20	Pass
NVNT	g	2412	10.59	10.48	/	20	Pass
NVNT	g	2442	10.91	10.83	/	20	Pass
NVNT	g	2472	10.63	10.52	/	20	Pass
NVNT	n20	2412	9.69	9.55	12.63	20	Pass
NVNT	n20	2442	10.03	9.84	12.95	20	Pass
NVNT	n20	2472	9.73	9.6	12.68	20	Pass
NVNT	n40	2422	8.81	8.63	11.73	20	Pass
NVNT	n40	2442	8.92	8.66	11.80	20	Pass
NVNT	n40	2462	8.79	8.46	11.64	20	Pass
NVNT	ax20	2412	9.83	9.54	12.70	20	Pass
NVNT	ax20	2442	10.05	9.87	<b>12.97</b>	20	Pass
NVNT	ax20	2472	9.77	9.69	12.74	20	Pass
NVNT	ax40	2422	8.93	8.81	11.88	20	Pass
NVNT	ax40	2442	9.05	8.83	11.95	20	Pass
NVNT	ax40	2462	8.88	8.6	11.75	20	Pass
NVLT	b	2412	11.49	11.47	/	20	Pass
NVLT	b	2442	11.67	11.38	/	20	Pass
NVLT	b	2472	11.47	11.24	/	20	Pass
NVLT	g	2412	10.49	10.46	/	20	Pass
NVLT	g	2442	10.82	10.79	/	20	Pass
NVLT	g	2472	10.59	10.40	/	20	Pass
NVLT	n20	2412	9.64	9.45	12.55	20	Pass
NVLT	n20	2442	10.00	9.73	12.88	20	Pass
NVLT	n20	2472	9.73	9.56	12.66	20	Pass
NVLT	n40	2422	8.71	8.52	11.63	20	Pass
NVLT	n40	2442	8.91	8.64	11.78	20	Pass
NVLT	n40	2462	8.66	8.43	11.56	20	Pass
NVLT	ax20	2412	9.82	9.44	12.64	20	Pass
NVLT	ax20	2442	10.03	9.79	12.92	20	Pass
NVLT	ax20	2472	9.66	9.56	12.63	20	Pass
NVLT	ax40	2422	8.86	8.70	11.79	20	Pass
NVLT	ax40	2442	8.93	8.73	11.85	20	Pass
NVLT	ax40	2462	8.78	8.54	11.67	20	Pass
NVHT	b	2412	11.47	11.44	/	20	Pass
NVHT	b	2442	11.55	11.32	/	20	Pass
NVHT	b	2472	11.38	11.21	/	20	Pass
NVHT	g	2412	10.48	10.37	/	20	Pass
NVHT	g	2442	10.70	10.71	/	20	Pass





NVHT	g	2472	10.59	10.32	/	20	Pass
NVHT	n20	2412	9.52	9.42	12.48	20	Pass
NVHT	n20	2442	9.89	9.66	12.79	20	Pass
NVHT	n20	2472	9.71	9.48	12.61	20	Pass
NVHT	n40	2422	8.62	8.50	11.57	20	Pass
NVHT	n40	2442	8.80	8.56	11.69	20	Pass
NVHT	n40	2462	8.56	8.43	11.50	20	Pass
NVHT	ax20	2412	9.71	9.35	12.54	20	Pass
NVHT	ax20	2442	9.94	9.71	12.84	20	Pass
NVHT	ax20	2472	9.65	9.54	12.61	20	Pass
NVHT	ax40	2422	8.85	8.64	11.76	20	Pass
NVHT	ax40	2442	8.92	8.71	11.83	20	Pass
NVHT	ax40	2462	8.76	8.42	11.60	20	Pass

Modulation: Antenna A (the worst data)


Only show NVNT, b mode.

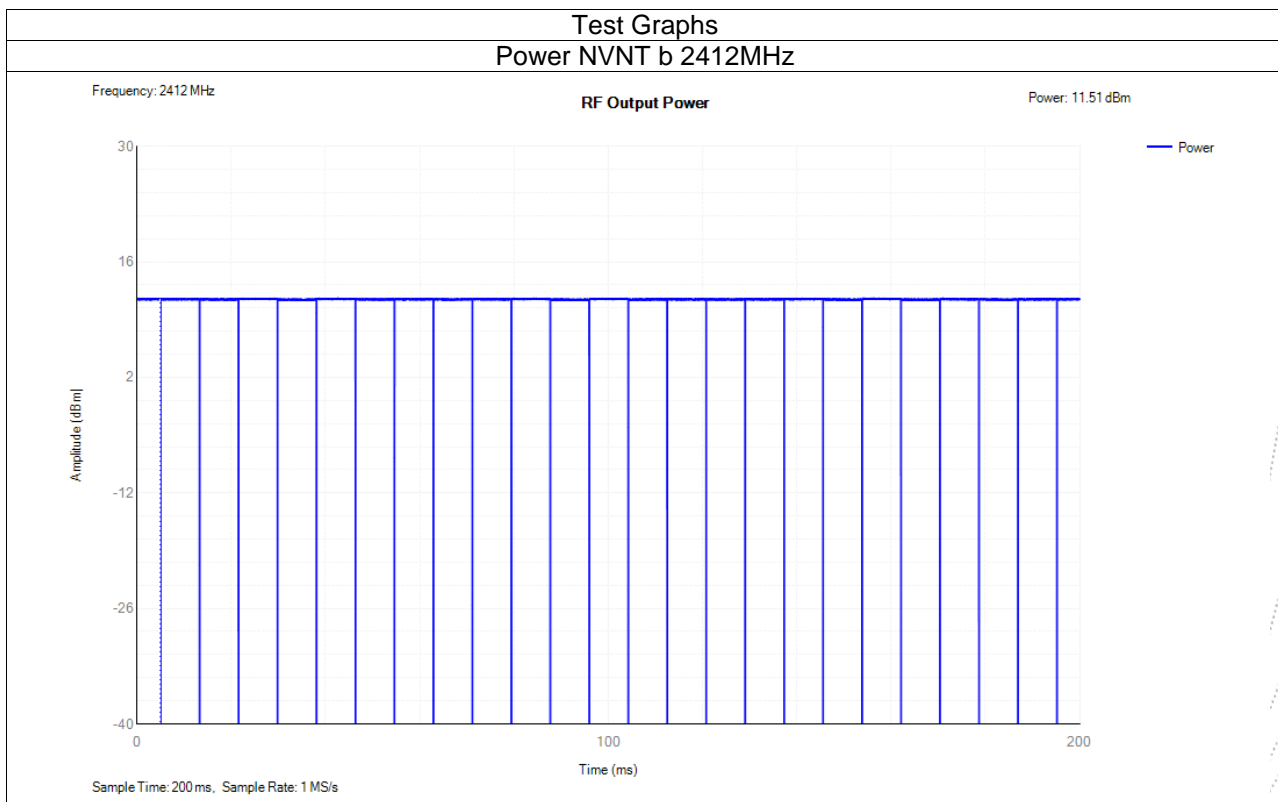

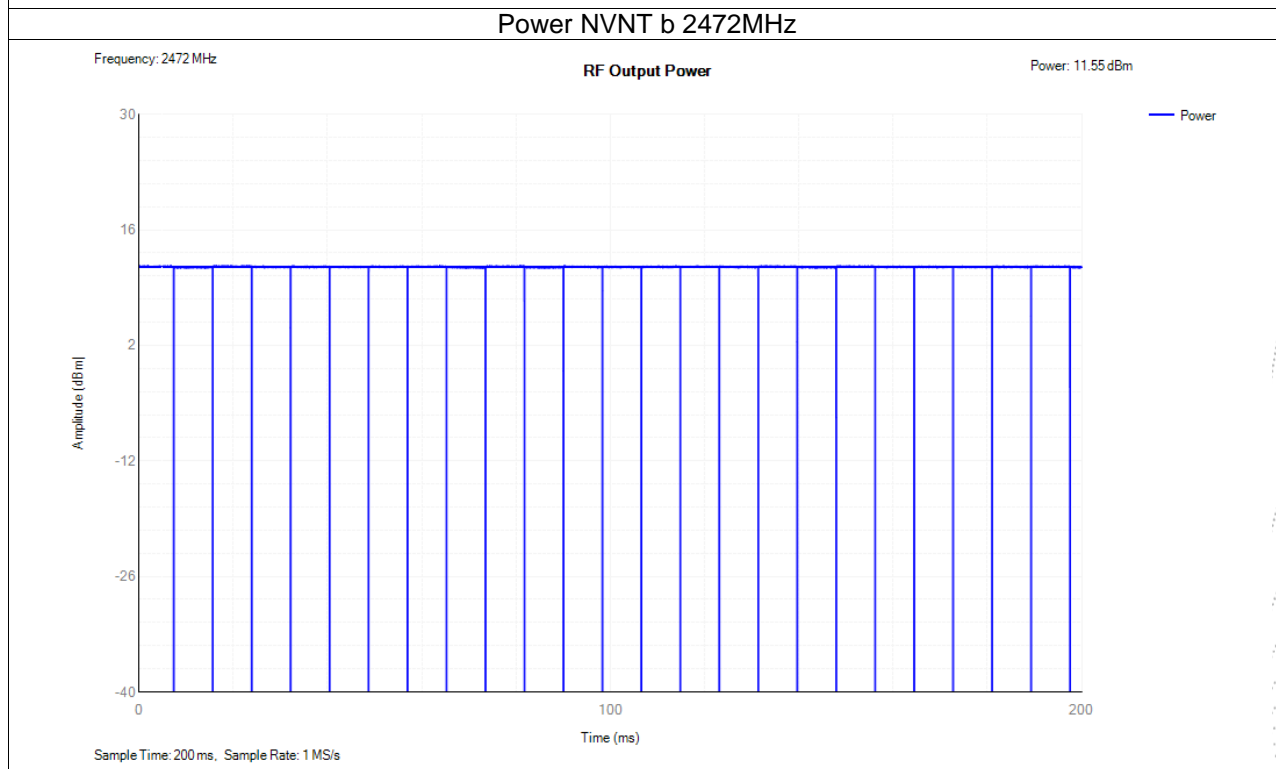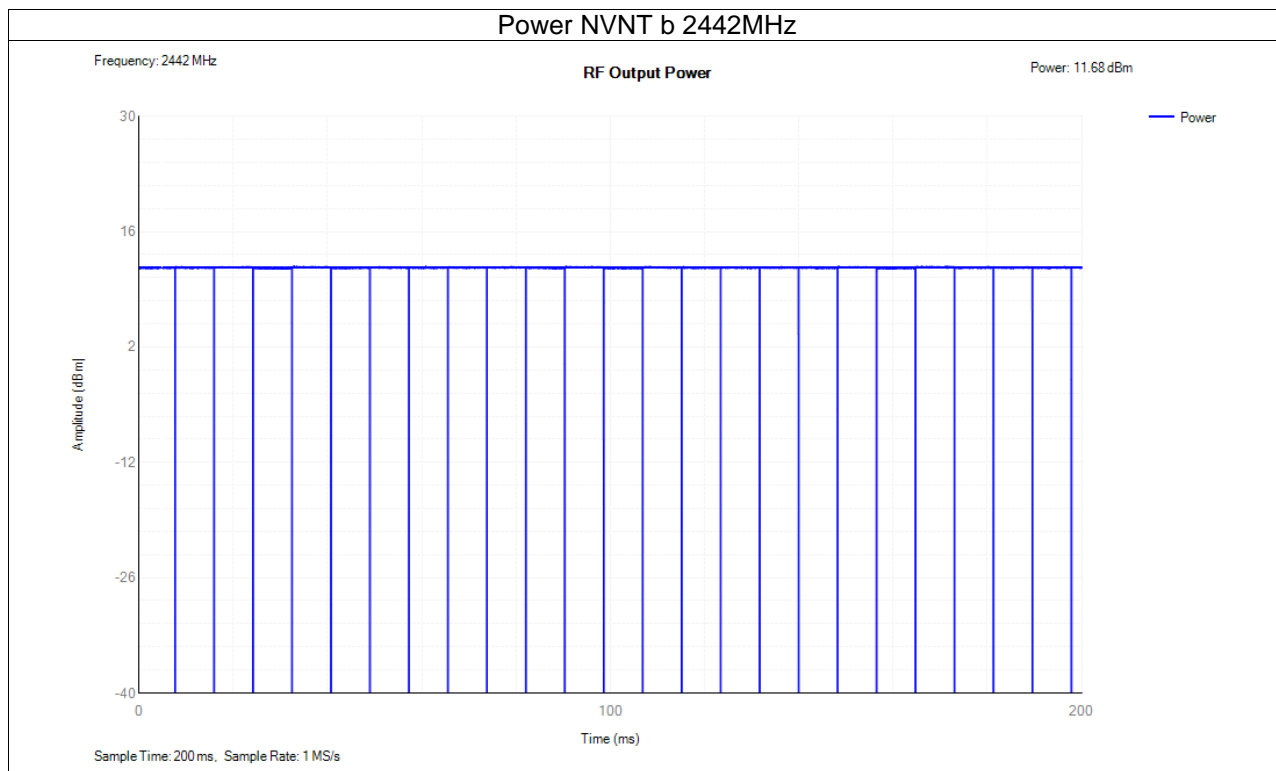

## 8. Power Spectral Density

### 8.1 Block Diagram Of Test Setup

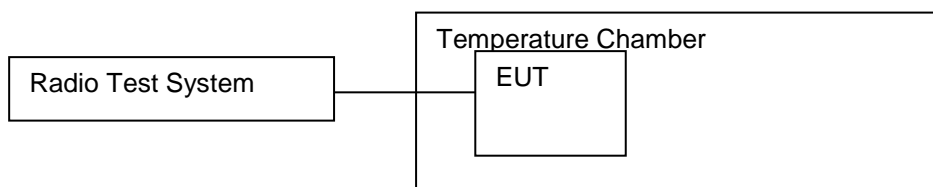

### 8.2 Limit

For equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10 dBm per MHz.

Limit
10dBm/MHz

### 8.3 Test Procedure

#### Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Start Frequency: 2 400 MHz
- Stop Frequency: 2 483,5 MHz
- Resolution BW: 10 kHz
- Video BW: 30 kHz
- Sweep Points: > 8 350

NOTE: For spectrum analysers not supporting this number of sweep points, the frequency band may be segmented.

- Detector: RMS
- Trace Mode: Max Hold
- Sweep time: 10 s; the sweep time may be increased further until a value where the sweep time has no impact on the RMS value of the signal

For non-continuous signals, wait for the trace to stabilize.

Save the data (trace data) set to a file.

#### Step 2:

For conducted measurements on smart antenna systems using either operating mode 2 or operating mode 3 (see clause 5.1.3.2), repeat the measurement for each of the transmit ports. For each sampling point (frequency domain), add up the coincident power values (in mW) for the different transmit chains and use this as the new data set.

#### Step 3:

Add up the values for power for all the samples in the file using the formula below.

$$P_{Sum} = \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

**Step 4:**

Normalize the individual values for power (in dBm) so that the sum is equal to the RF Output Power (e.i.r.p.) measured in clause 5.3.2 and save the corrected data. The following formulas can be used:

$$C_{Corr} = P_{Sum} - P_{e.i.r.p.}$$

$$P_{Samplecorr}(n) = P_{Sample}(n) - C_{Corr}$$

with 'n' being the actual sample number

**Step 5:**

Starting from the first sample  $P_{Samplecorr}(n)$  (lowest frequency), add up the power (in mW) of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to sample #100). This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment which shall be recorded.

**Step 6:**

Shift the start point of the samples added up in step 5 by one sample and repeat the procedure in step 5 (i.e. sample #2 to sample #101).

**Step 7:**


Repeat step 6 until the end of the data set and record the Power Spectral Density values for each of the 1 MHz segments.


From all the recorded results, the highest value is the maximum Power Spectral Density for the UUT. This value, which shall comply with the limit given in clause 4.3.2.3.3, shall be recorded in the test report.

## 8.4 Test Result

Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz) Ant A	Max PSD (dBm/MHz) Ant B	Total	Limit (dBm/MHz)	Verdict
NVNT	b	2412	1.97	1.99	/	10	Pass
NVNT	b	2442	<b>2.1</b>	1.81	/	10	Pass
NVNT	b	2472	1.99	1.83	/	10	Pass
NVNT	g	2412	-1.09	-1.16	/	10	Pass
NVNT	g	2442	-0.79	-0.9	/	10	Pass
NVNT	g	2472	-1.04	-1.23	/	10	Pass
NVNT	n20	2412	-2.11	-2.26	0.83	10	Pass
NVNT	n20	2442	-1.86	-2.09	1.04	10	Pass
NVNT	n20	2472	-2.16	-2.39	0.74	10	Pass
NVNT	n40	2422	-6.06	-6.37	-3.20	10	Pass
NVNT	n40	2442	-6.08	-6.34	-3.20	10	Pass
NVNT	n40	2462	-6.13	-6.46	-3.28	10	Pass
NVNT	ax20	2412	-2.35	-2.65	0.51	10	Pass
NVNT	ax20	2442	-2.13	-2.34	0.78	10	Pass
NVNT	ax20	2472	-2.36	-2.58	0.54	10	Pass
NVNT	ax40	2422	-6.41	-6.5	-3.44	10	Pass
NVNT	ax40	2442	-6.41	-6.58	-3.48	10	Pass
NVNT	ax40	2462	-6.44	-6.77	-3.59	10	Pass


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.(Only show NVNT, b mode)

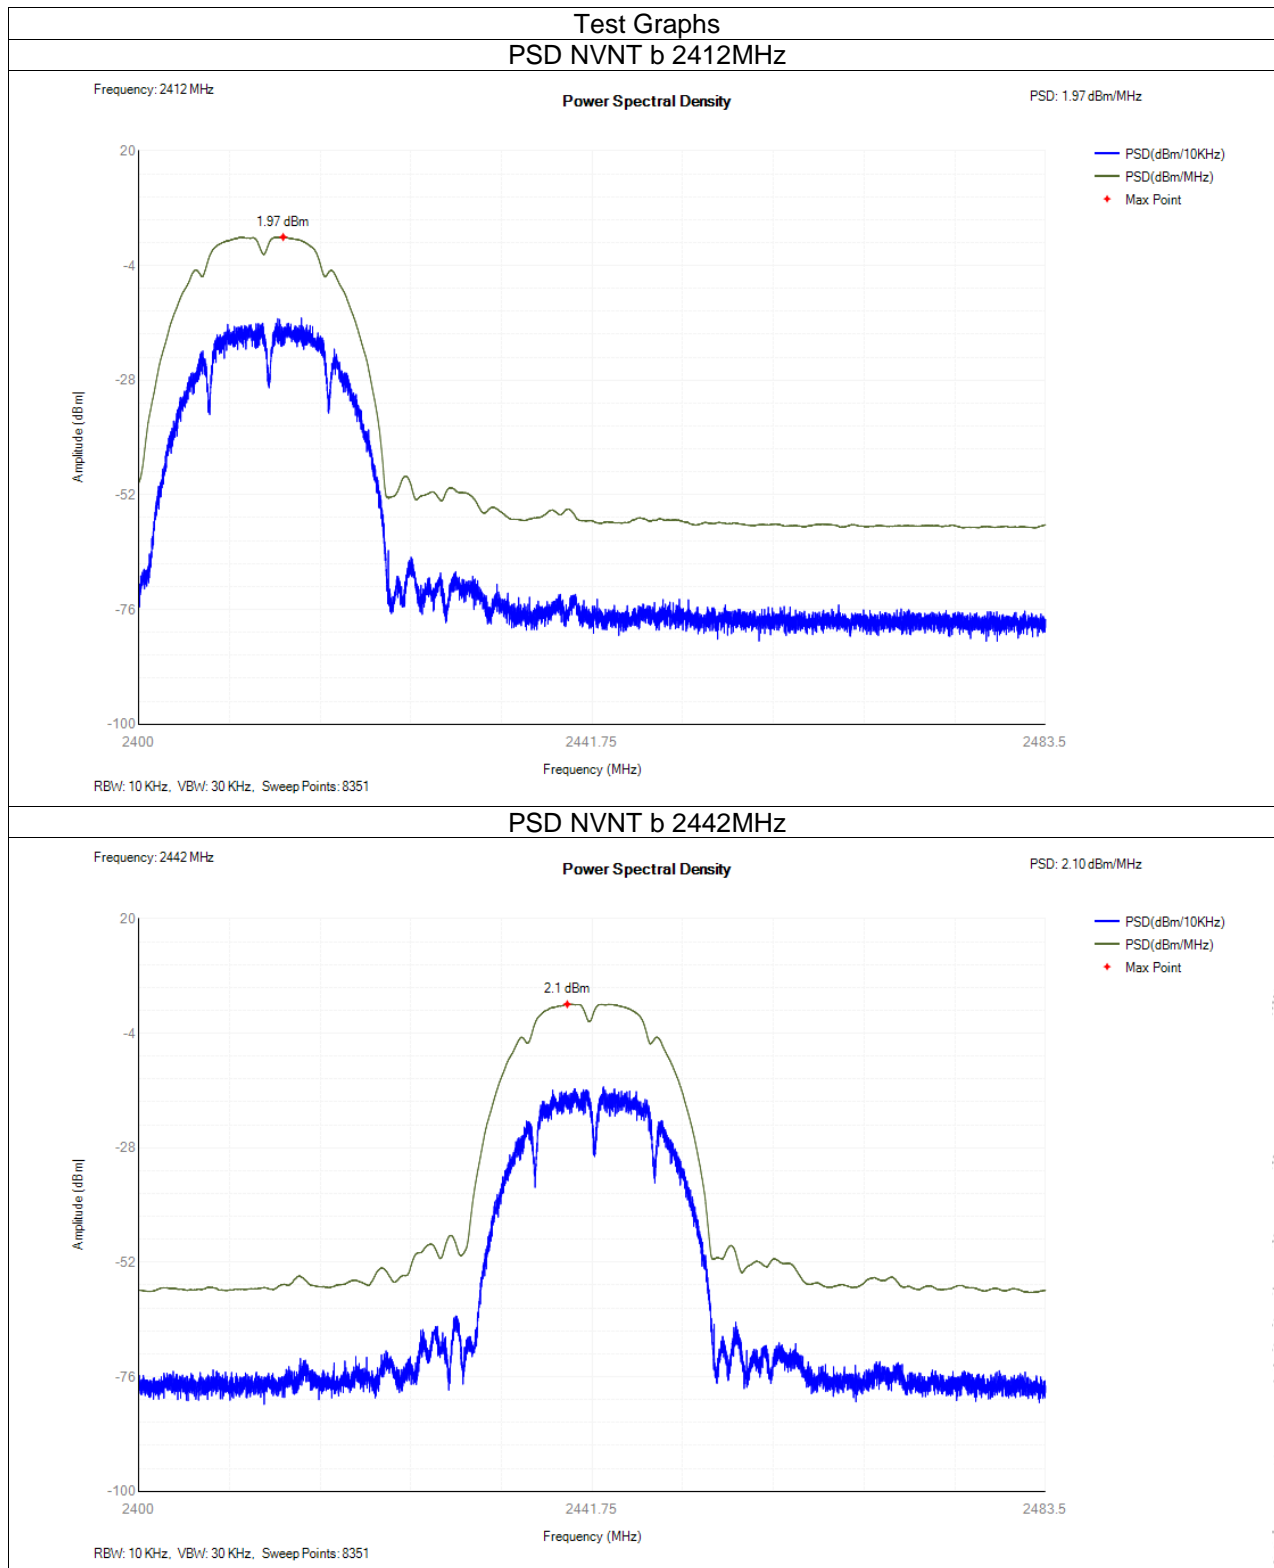

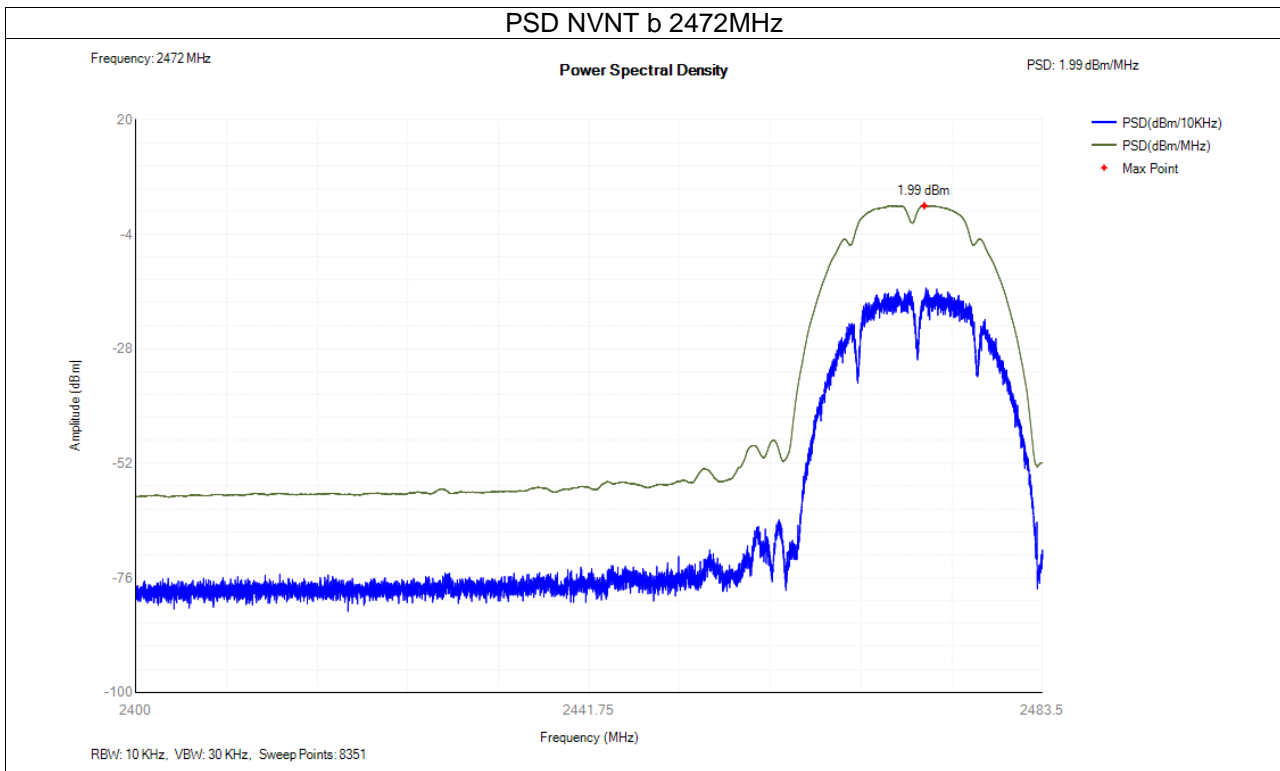

## 9. Adaptivity

### 9.1 Block Diagram Of Test Setup

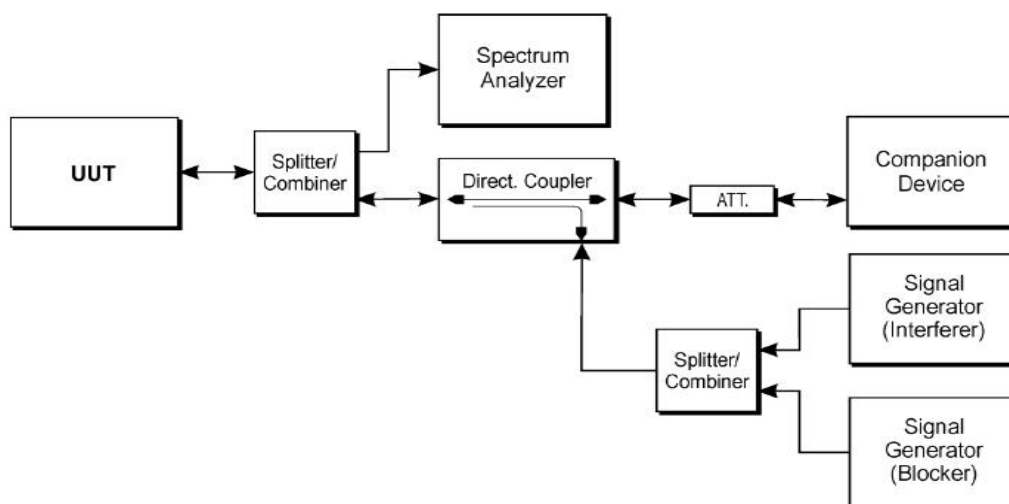

### 9.2 Limit

The frequency range of the equipment is determined by the lowest and highest

Non-LBT based Detect and Avoid: 1 The frequency shall remain unavailable for a minimum time equal to 1 second after which the channel maybe considered again as an 'available' channel; 2 COT $\leq 40$ ms; 3 Idle Period = 5% of COT; 4 Detection threshold level = $-70\text{dBm/MHz} + 20 - \text{Pout E.I.R.P}$ (Pout in dBm);
LBT based Detect and Avoid (Frame Based Equipment): 1 Minimum Clear Channel Assessment (CCA) time = 20 $\mu\text{s}$ ; 2 CCA observation time declared by the supplier; 3 COT = 1~10 ms; 4 Idle Period = 5% of COT; 5 Detection threshold level = $-70\text{dBm/MHz} + 20 - \text{Pout E.I.R.P}$ (Pout in dBm);
LBT based Detect and Avoid (Load Based Equipment): 1 Minimum Clear Channel Assessment (CCA) time = 20 $\mu\text{s}$ ; 2 CCA declared by the manufacturer; 3 COT $\leq (13 / 32) * q$ ms; $q = [4 \sim 32]$ ; 1.625ms~13ms; 4 Detection threshold level = $-73\text{dBm/MHz} + 20 - \text{Pout E.I.R.P}$ (dBm);
Short Control Signalling Transmissions: Short Control Signalling Transmissions shall have a maximum duty cycle of 10% within an observation period of 50ms.



### 9.3 Test Procedure

#### Step 1:

The UUT may connect to a companion device during the test. The interference signal generator, the blocking signal generator, the spectrum analyser, the UUT and the companion device are connected using a set-up equivalent to the example given by figure 5 although the interference and blocking signal generator do not generate any signals at this point in time. The spectrum analyser is used to monitor the transmissions of the UUT in response to the interfering and the blocking signals.

Adjust the received signal level (wanted signal from the companion device) at the UUT to the value defined in table 6

The analyzer shall be set as follows:

- RBW:  $\geq$  Occupied Channel Bandwidth (if the analyser does not support this setting, the highest available setting shall be used)
- VBW:  $3 \times$  RBW (if the analyser does not support this setting, the highest available setting shall be used)
- Detector Mode: RMS
- Centre Frequency: Equal to the centre frequency of the operating channel
- Span: 0 Hz
- Sweep time:  $>$  Channel Occupancy Time of the UUT
- Trace Mode: Clear/Write
- Trigger Mode: Video

#### Step 2:

Configure the UUT for normal transmissions with a sufficiently high payload to allow demonstration of compliance of the adaptive mechanism on the channel being tested

Using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that the UUT complies with the maximum Channel Occupancy Time and minimum Idle Period

#### Step 3: Adding the interference signal

A 100 % duty cycle interference signal is injected on the current operating channel of the UUT. This interference signal shall be a band limited noise signal which has a flat power spectral density, and shall have a bandwidth greater than the Occupied Channel Bandwidth of the UUT. The maximum ripple of this interfering signal shall be  $\pm 1,5$  dB within the Occupied Channel Bandwidth and the power spectral density.

#### Step 4: Verification of reaction to the interference signal

The spectrum analyser shall be used to monitor the transmissions of the UUT on the selected operating channel with the interfering signal injected. This may require the spectrum analyser sweep to be triggered by the start of the interfering signal.

Using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that:

The UUT shall stop transmissions on the current operating channel being tested.

Apart from Short Control Signalling Transmissions (see iii) below), there shall be no subsequent transmissions on this operating channel for a (silent) period defined in clause 4.3.2.5.1.2 step 2. After that, the UUT may have normal transmissions again for the duration of a single Channel Occupancy Time period. Because the interference signal is still present, another silent period as defined in clause 4.3.2.5.1.2 step 2 needs to be included. This sequence is repeated as long as the interfering signal is present.

The UUT may continue to have Short Control Signalling Transmissions on the operating channel while the interference signal is present. These transmissions shall comply with the limits

Alternatively, the equipment may switch to a non-adaptive mode

#### Step 5: Adding the blocking signal

With the interfering signal present, a 100 % duty cycle CW signal is inserted as the blocking signal  
Repeat step 4 to verify that the UUT does not resume any normal transmissions



**Step 6: Removing the interference and blocking signal**


On removal of the interference and blocking signal the UUT is allowed to start transmissions again on this channel however, it shall be verified that this shall only be done after the period defined in clause 4.3.2.5.1.2 step 2.

**Step 7:**

The steps 2 to 6 shall be repeated for each of the frequencies to be tested.


## 9.4 Test Result

PASS

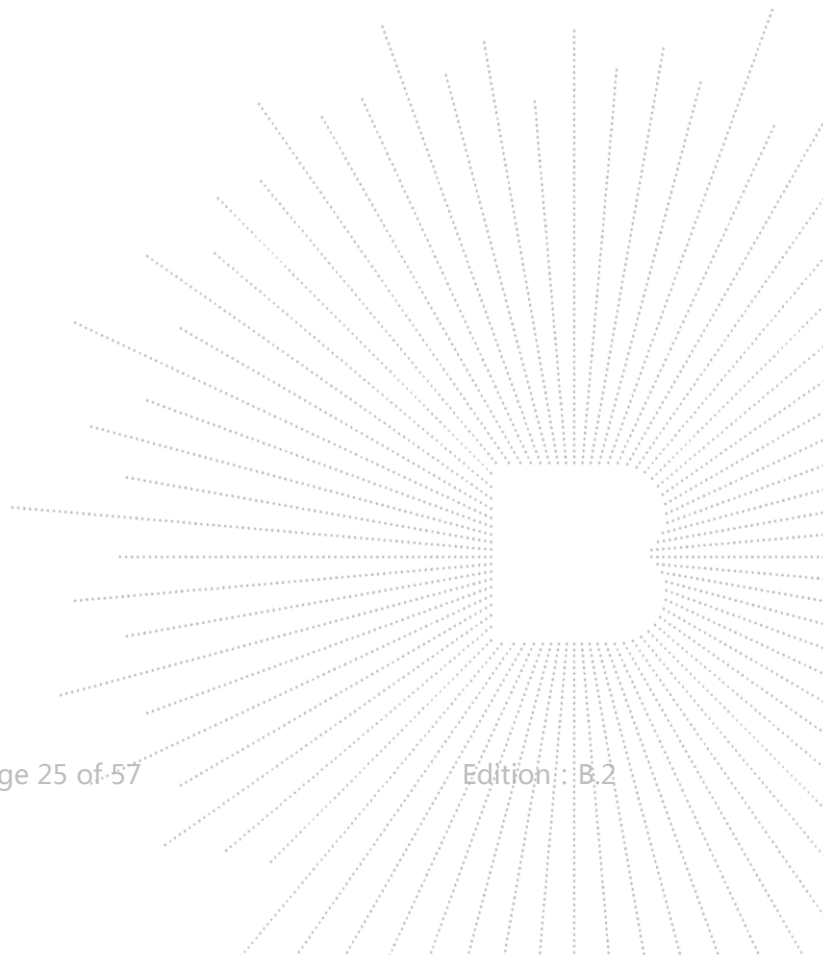

## 10. Occupied Channel Bandwidth

### 10.1 Block Diagram Of Test Setup

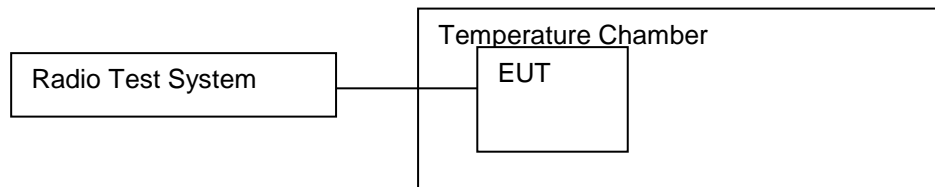

### 10.2 Limit

The Occupied Channel Bandwidth shall fall completely within the band given in 2.4GHz to 2.4835GHz. In addition, for non-adaptive systems using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.

### 10.3 Test Procedure

#### Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: ~ 1 % of the span without going below 1 %
- Video BW: 3 × RBW
- Frequency Span: 2 × Nominal Channel Bandwidth
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep time: 1 s

#### Step 2:

Wait for the trace to stabilize.

Find the peak value of the trace and place the analyser marker on this peak.

#### Step 3:

Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT.

This value shall be recorded.

NOTE: Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.

## 10.4 Test Result

ANT A

Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	b	2412	2411.972	14.855	2404.545	2419.4	2400 - 2483.5MHz	Pass
NVNT	b	2472	2471.99	14.838	2464.571	2479.409	2400 - 2483.5MHz	Pass
NVNT	g	2412	2411.975	16.481	2403.734	2420.215	2400 - 2483.5MHz	Pass
NVNT	g	2472	2471.977	16.482	2463.736	2480.217	2400 - 2483.5MHz	Pass
NVNT	n20	2412	2411.971	17.679	2403.131	2420.81	2400 - 2483.5MHz	Pass
NVNT	n20	2472	2471.977	17.679	2463.138	2480.817	2400 - 2483.5MHz	Pass
NVNT	n40	2422	2422.003	36.424	2403.791	2440.215	2400 - 2483.5MHz	Pass
NVNT	n40	2462	2462.001	36.343	2443.829	2480.172	2400 - 2483.5MHz	Pass
NVNT	ax20	2412	2411.972	18.954	2402.495	2421.449	2400 - 2483.5MHz	Pass
NVNT	ax20	2472	2471.973	18.948	2462.499	2481.447	2400 - 2483.5MHz	Pass
NVNT	ax40	2422	2422.003	<b>37.995</b>	2403.006	2441	2400 - 2483.5MHz	Pass
NVNT	ax40	2462	2462.002	37.926	2443.039	2480.965	2400 - 2483.5MHz	Pass



TC  
3C  
PPR  
Report



## ANT B

Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	b	2412	2412.023	14.893	2404.576	2419.469	2400 - 2483.5MHz	Pass
NVNT	b	2472	2472.003	14.92	2464.543	2479.463	2400 - 2483.5MHz	Pass
NVNT	g	2412	2411.973	16.485	2403.73	2420.215	2400 - 2483.5MHz	Pass
NVNT	g	2472	2471.987	16.488	2463.743	2480.231	2400 - 2483.5MHz	Pass
NVNT	n20	2412	2411.97	17.689	2403.126	2420.815	2400 - 2483.5MHz	Pass
NVNT	n20	2472	2471.988	17.688	2463.144	2480.832	2400 - 2483.5MHz	Pass
NVNT	n40	2422	2421.985	36.433	2403.769	2440.202	2400 - 2483.5MHz	Pass
NVNT	n40	2462	2462.005	36.381	2443.815	2480.195	2400 - 2483.5MHz	Pass
NVNT	ax20	2412	2411.971	18.968	2402.486	2421.455	2400 - 2483.5MHz	Pass
NVNT	ax20	2472	2471.985	18.966	2462.502	2481.468	2400 - 2483.5MHz	Pass
NVNT	ax40	2422	2421.985	<b>38.022</b>	2402.974	2440.996	2400 - 2483.5MHz	Pass
NVNT	ax40	2462	2462.003	37.967	2443.02	2480.986	2400 - 2483.5MHz	Pass



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B, only shown Antenna B Plot.



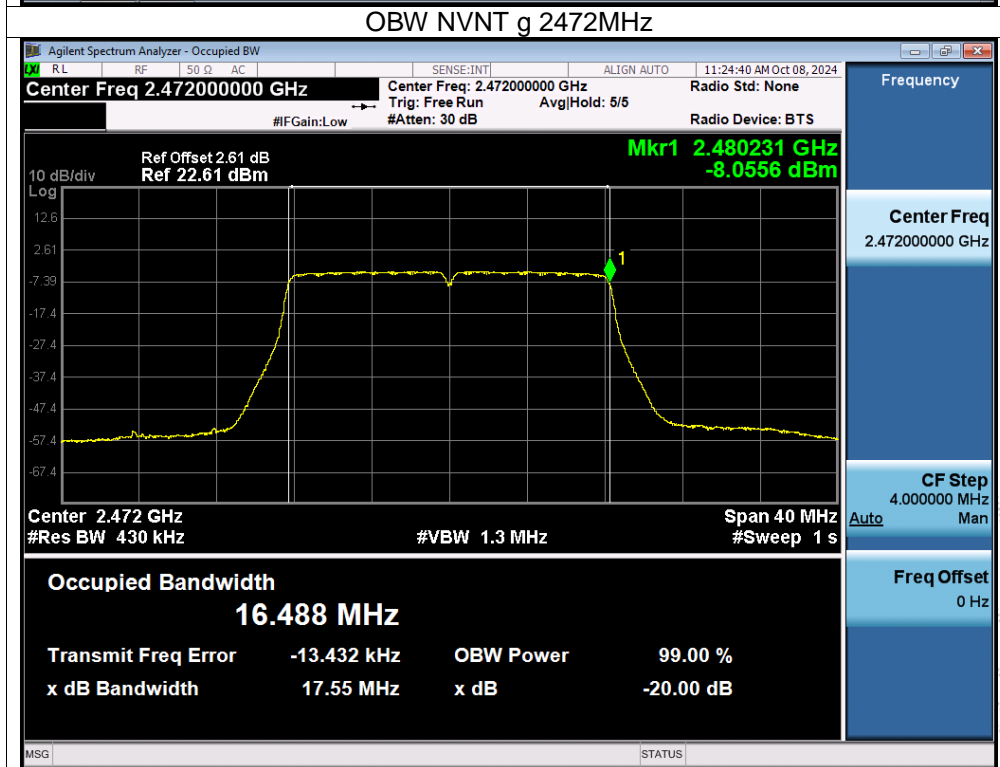
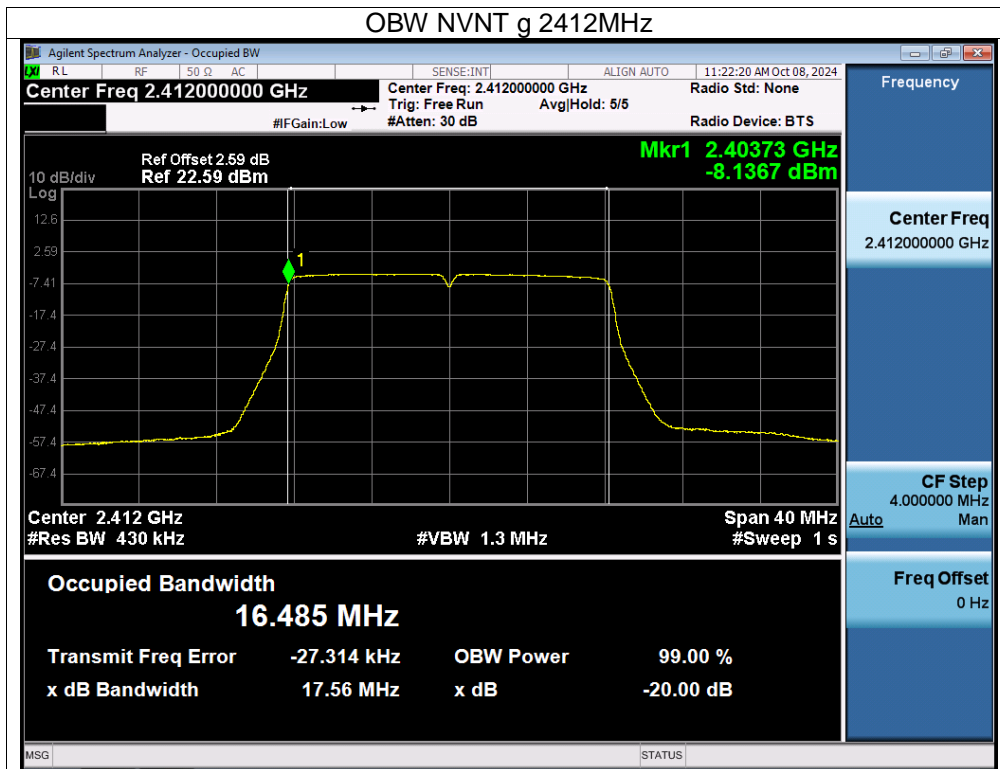


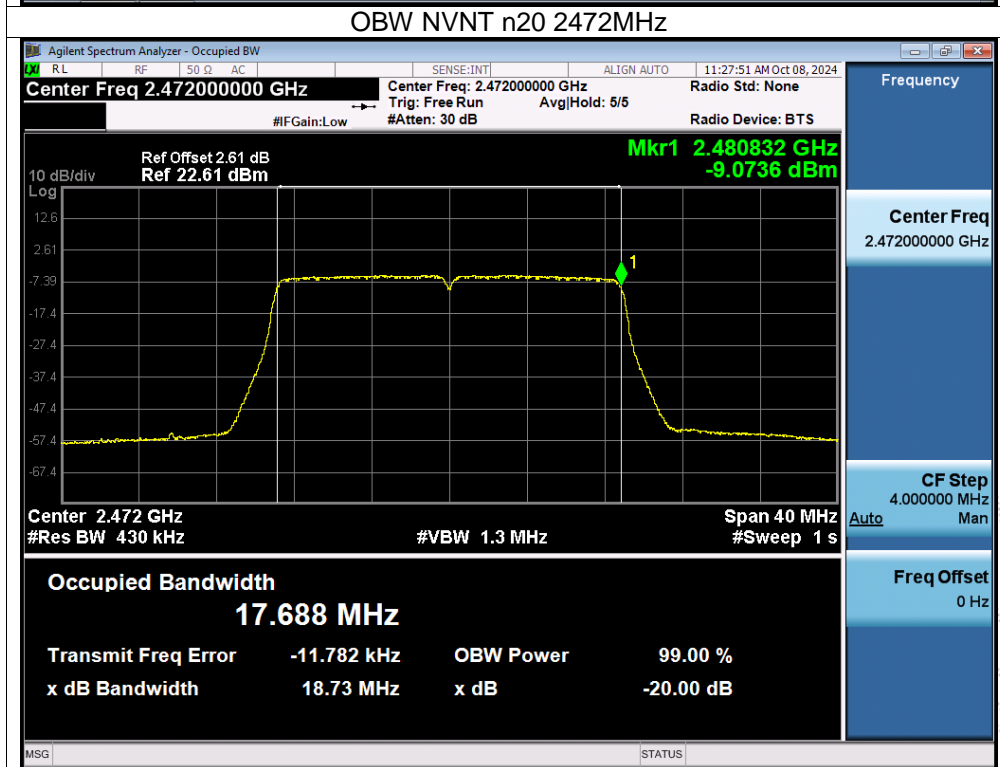
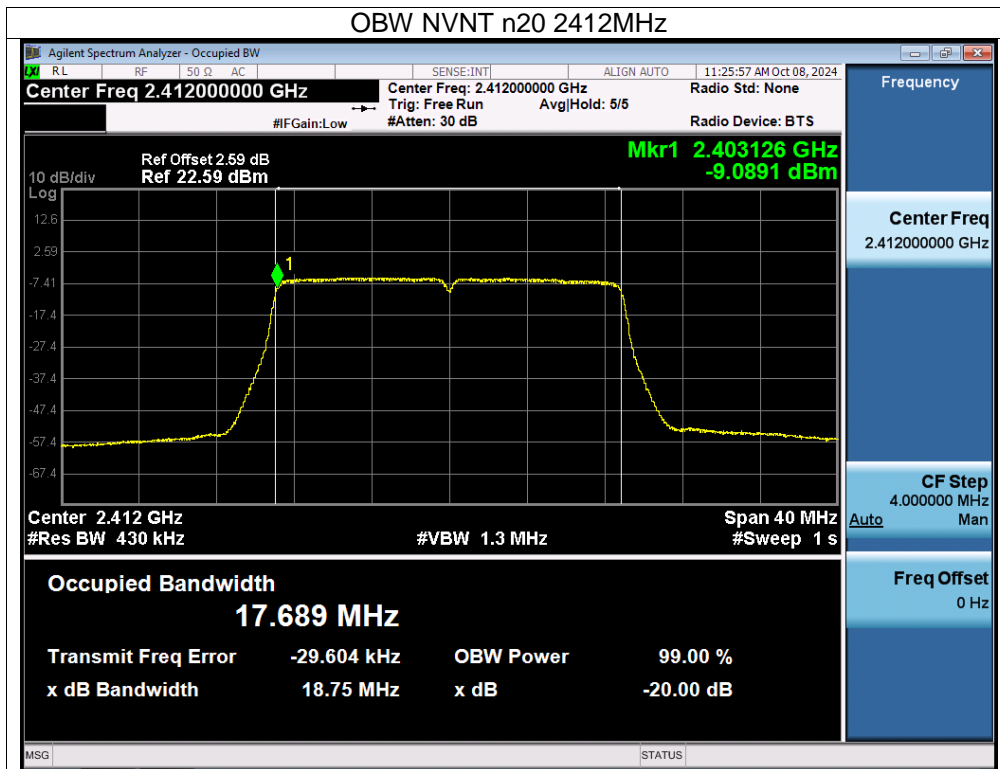




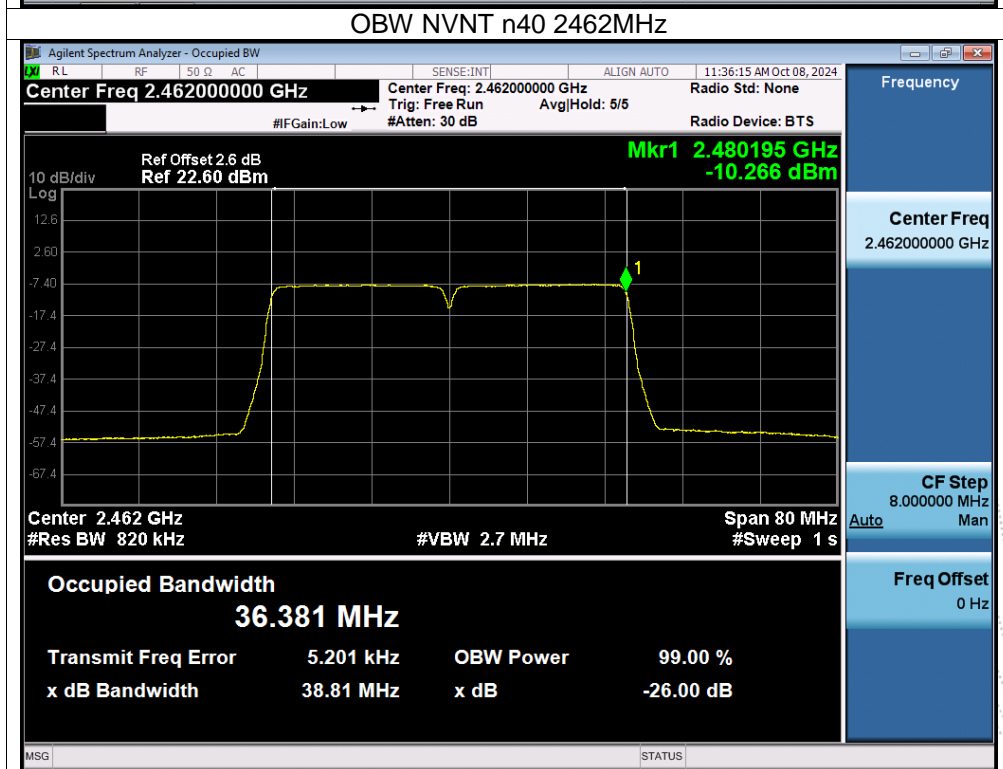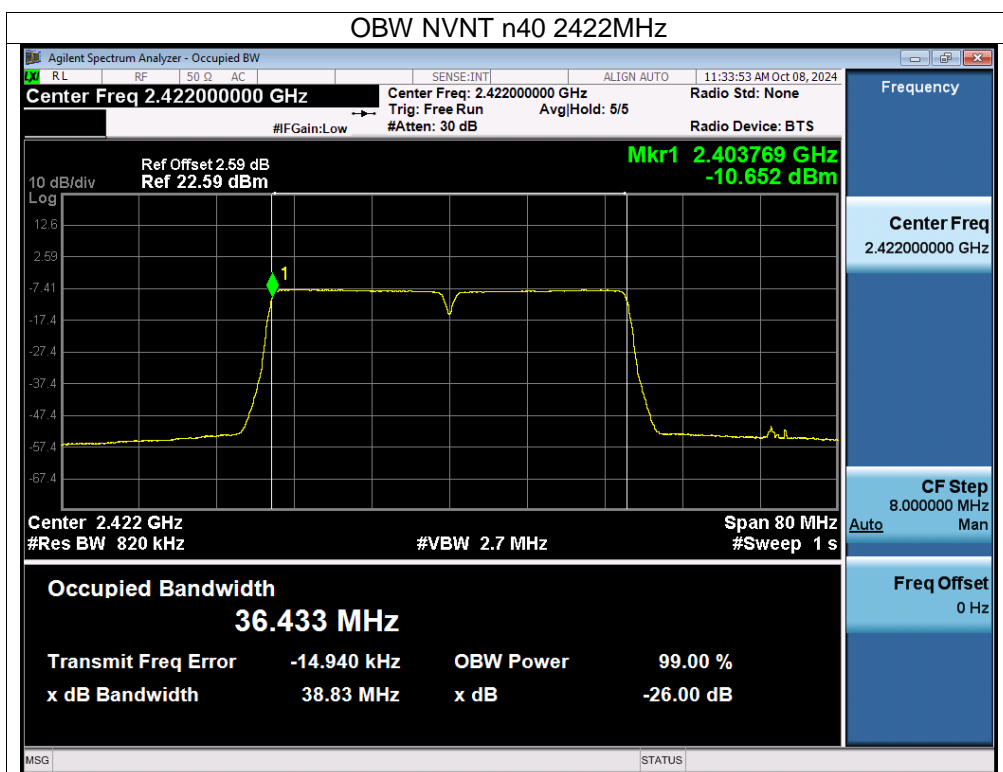




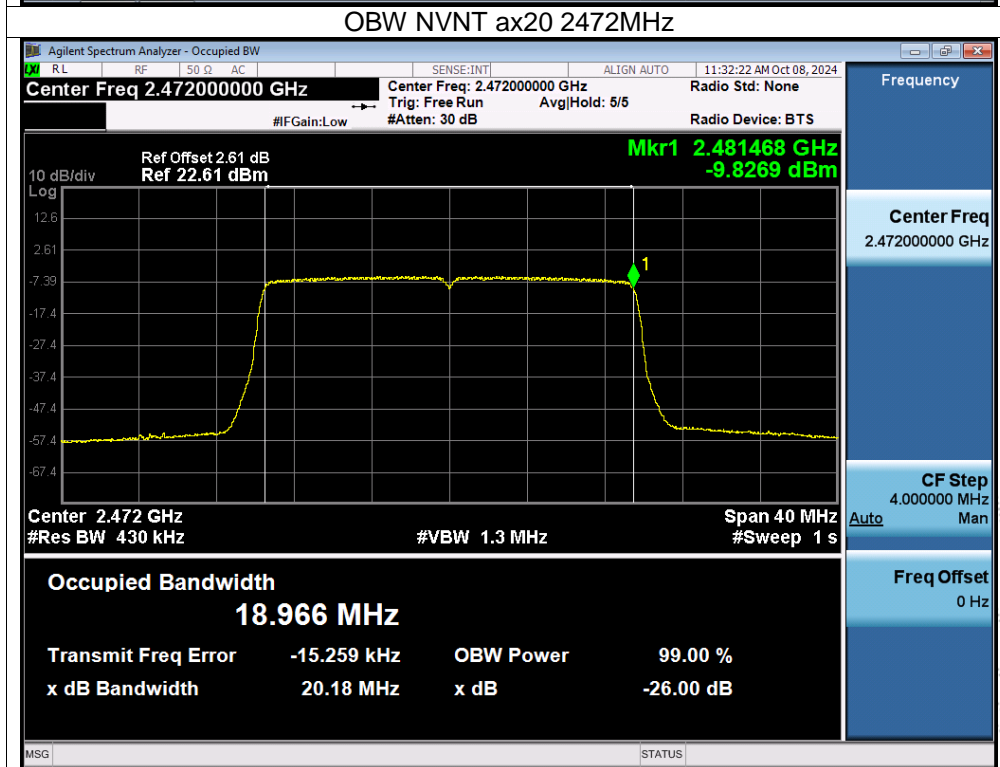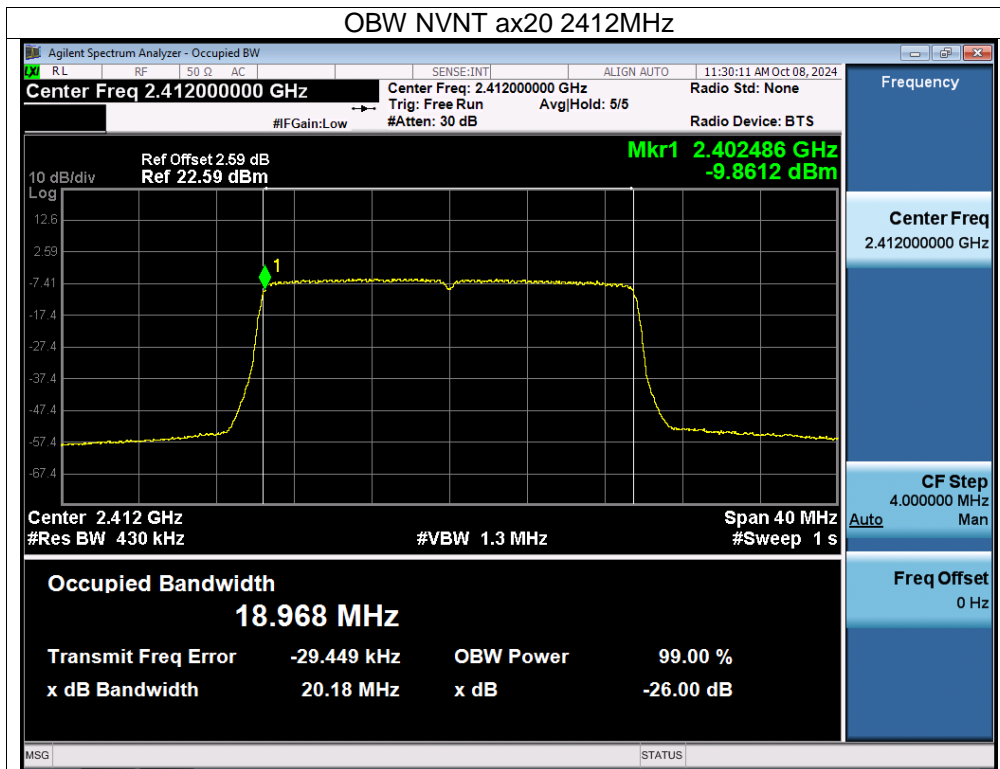

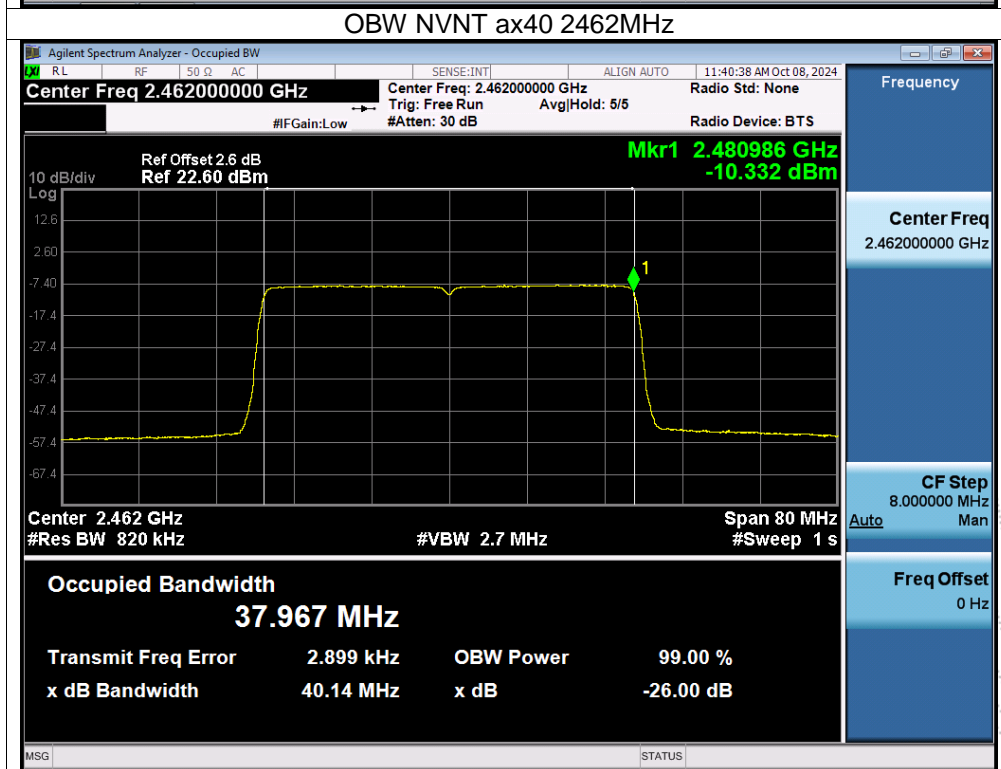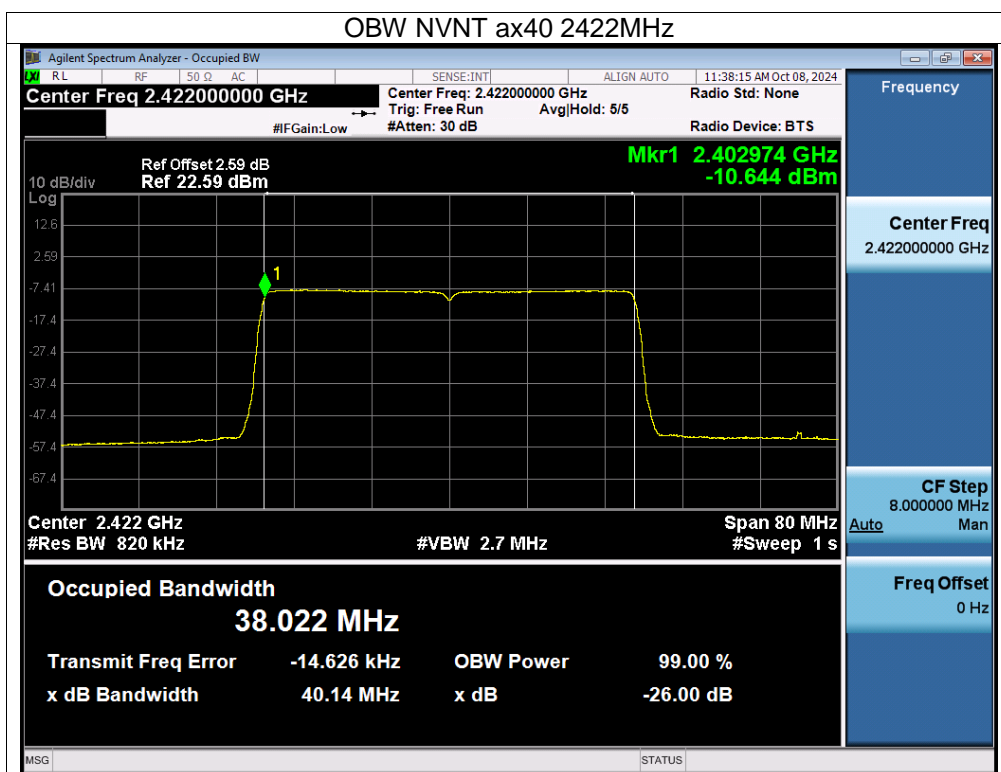


## 11. Transmitter Unwanted Emissions In The Out-Of-Band Domain

### 11.1 Block Diagram Of Test Setup

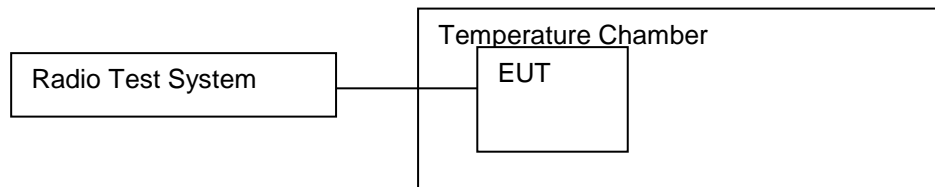

### 11.2 Limit

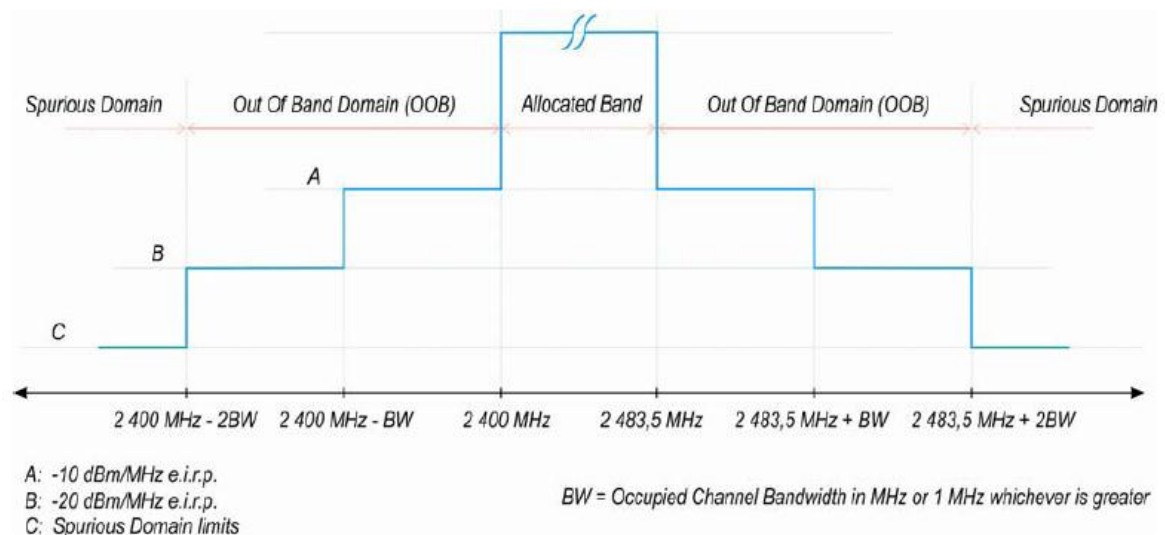

**Figure 3: Transmit mask**

### 11.3 Test Procedure

The applicable mask is defined by the measurement results from the tests performed under clause 5.3.8 (Occupied Channel Bandwidth).

The test procedure is further as described under clause 5.3.9.2.1.

The Out-of-band emissions within the different horizontal segments of the mask provided in figures 1 and 3 shall be measured using the steps below. This method assumes the spectrum analyser is equipped with the Time Domain Power option.

#### Step 1:

- Connect the UUT to the spectrum analyser and use the following settings:
- Centre Frequency: 2 484 MHz
- Span: 0 Hz
- Resolution BW: 1 MHz
- Filter mode: Channel filter
- Video BW: 3 MHz
- Detector Mode: RMS

- Trace Mode: Max Hold
- Sweep Mode: Continuous
- Sweep Points: Sweep Time [s] / (1  $\mu$ s) or 5 000 whichever is greater
- Trigger Mode: Video trigger

NOTE 1: In case video triggering is not possible, an external trigger source may be used.

- Sweep Time: > 120 % of the duration of the longest burst detected during the measurement of the RF Output Power

**Step 2 (segment 2 483,5 MHz to 2 483,5 MHz + BW):**

- Adjust the trigger level to select the transmissions with the highest power level.
- For frequency hopping equipment operating in a normal hopping mode, the different hops will result in signal bursts with different power levels. In this case the burst with the highest power level shall be selected.
- Set a window (start and stop lines) to match with the start and end of the burst and in which the RMS power shall be measured using the Time Domain Power function.
- Select RMS power to be measured within the selected window and note the result which is the RMS power within this 1 MHz segment (2 483,5 MHz to 2 484,5 MHz). Compare this value with the applicable limit provided by the mask.
- Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2 483,5 MHz to 2 483,5 MHz + BW. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

**Step 3 (segment 2 483,5 MHz + BW to 2 483,5 MHz + 2BW):**

- Change the centre frequency of the analyser to 2 484 MHz + BW and perform the measurement for the first 1 MHz segment within range 2 483,5 MHz + BW to 2 483,5 MHz + 2BW. Increase the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + 2 BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

**Step 4 (segment 2 400 MHz - BW to 2 400 MHz):**

- Change the centre frequency of the analyser to 2 399,5 MHz and perform the measurement for the first 1 MHz segment within range 2 400 MHz - BW to 2 400 MHz. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

**Step 5 (segment 2 400 MHz - 2BW to 2 400 MHz - BW):**

- Change the centre frequency of the analyser to 2 399,5 MHz - BW and perform the measurement for the first 1 MHz segment within range 2 400 MHz - 2BW to 2 400 MHz - BW. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

**Step 6:**

- In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain "G" in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits provided by the mask given in figure 1 or figure 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.

- In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the measurements need to be repeated for each of the active transmit chains. The declared antenna assembly gain "G" in dBi for a single antenna shall be added to these results. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.

Comparison with the applicable limits shall be done using any of the options given below:


- Option 1: the results for each of the transmit chains for the corresponding 1 MHz segments shall be added. The additional beamforming gain "Y" in dB shall be added as well and the resulting values compared with the limits provided by the mask given in figure 1 or figure 3.
- Option 2: the limits provided by the mask given in figure 1 or figure 3 shall be reduced by  $10 \times \log_{10}(A_{ch})$  and the additional beamforming gain "Y" in dB. The results for each of the transmit chains shall be individually compared with these reduced limits.

NOTE 2:  $A_{ch}$  refers to the number of active transmit chains.


It shall be recorded whether the equipment complies with the mask provided in figure 1 or figure 3.

## 11.4 Test Result


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

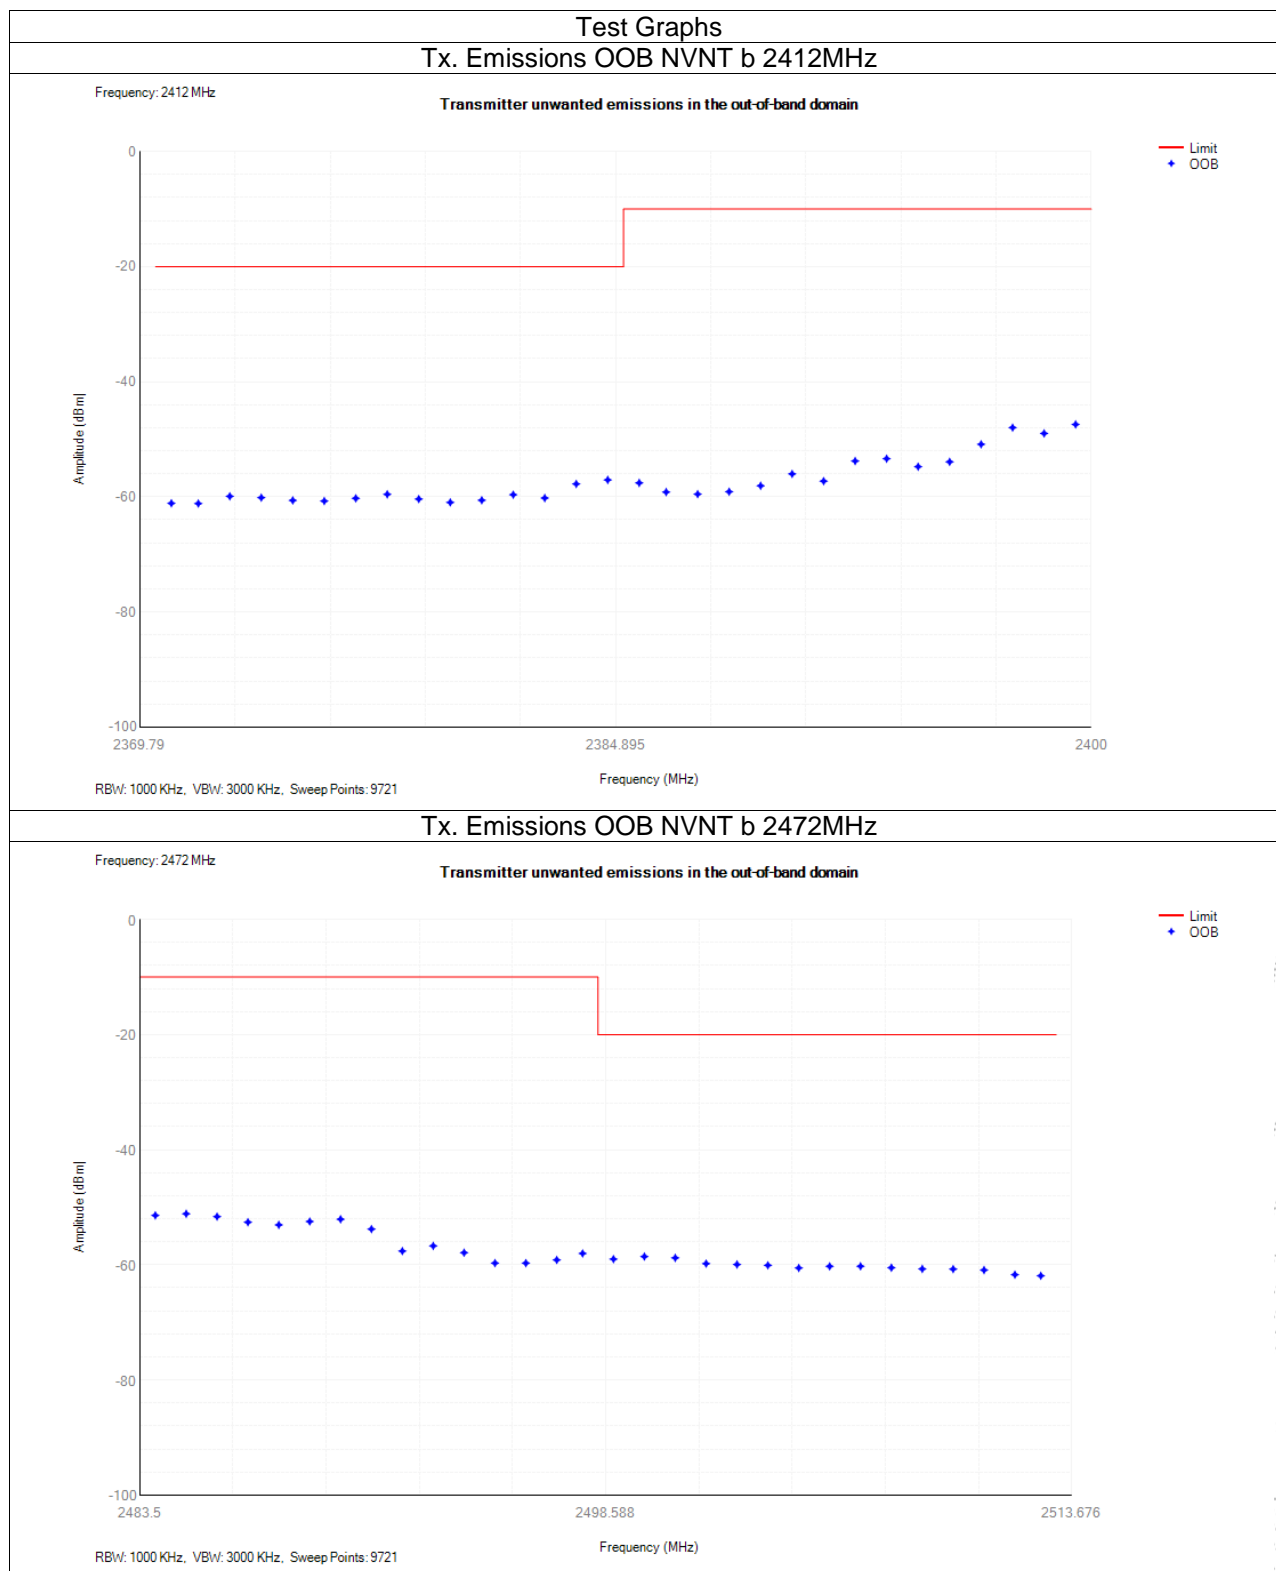

### Tx. Emissions OOB NVNT g 2412MHz

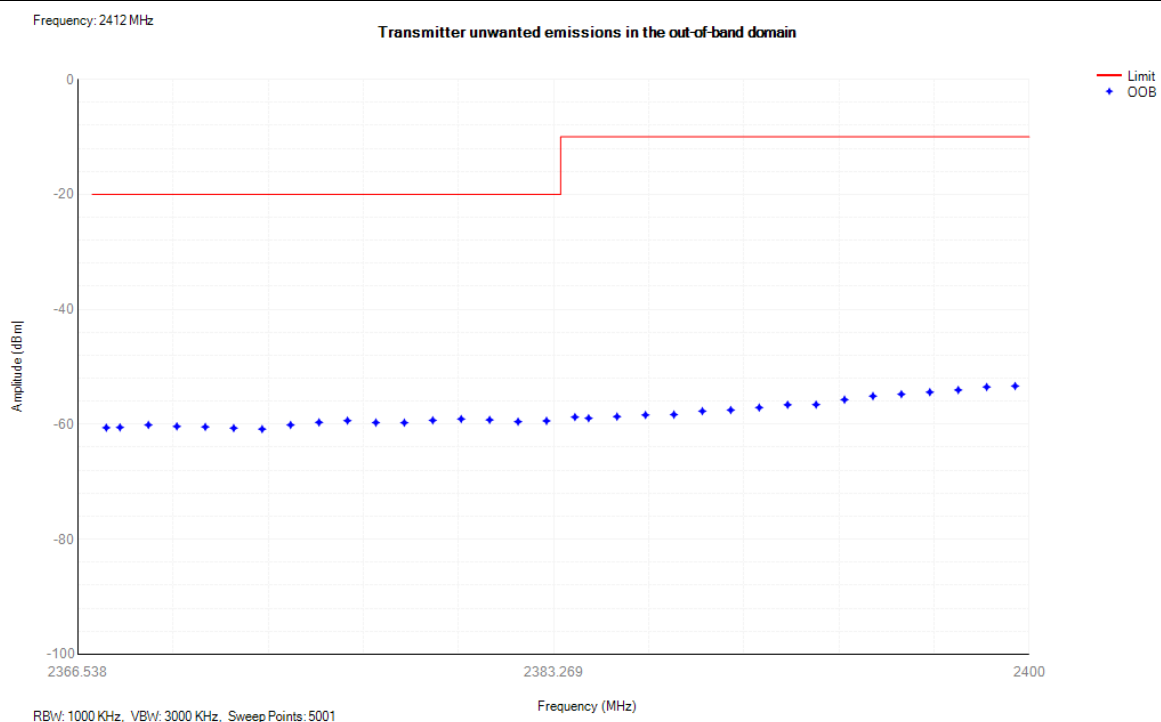


### Tx. Emissions OOB NVNT g 2472MHz

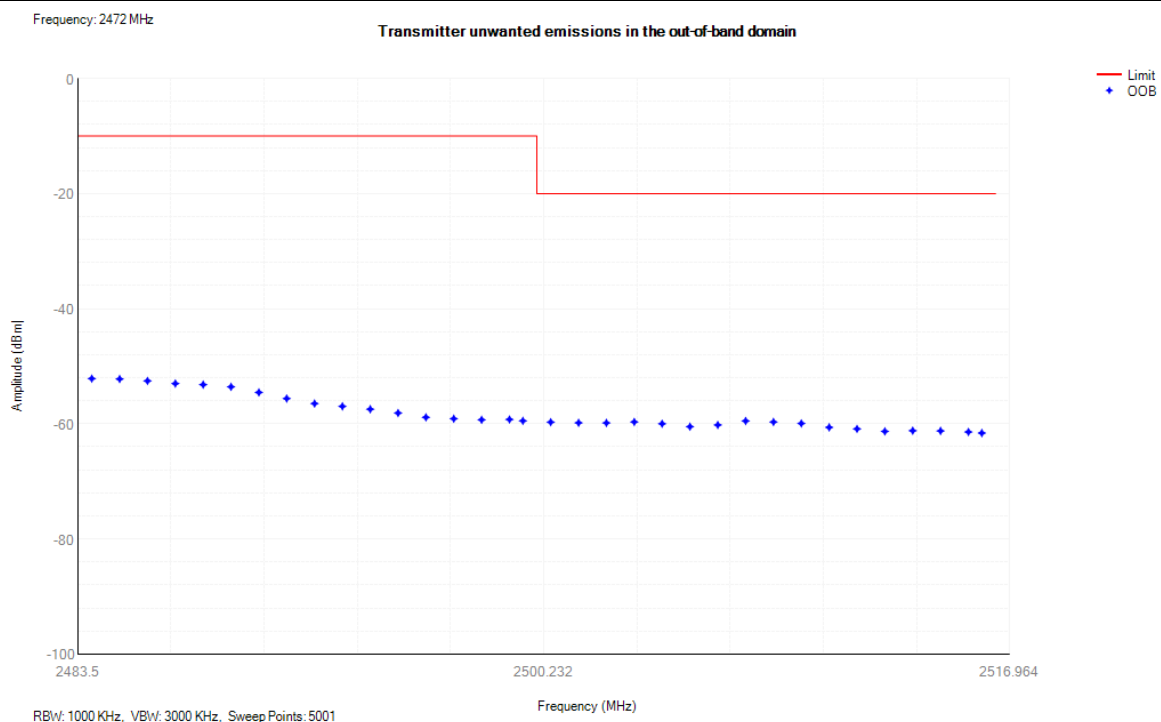





## Tx. Emissions OOB NVNT n20 2412MHz

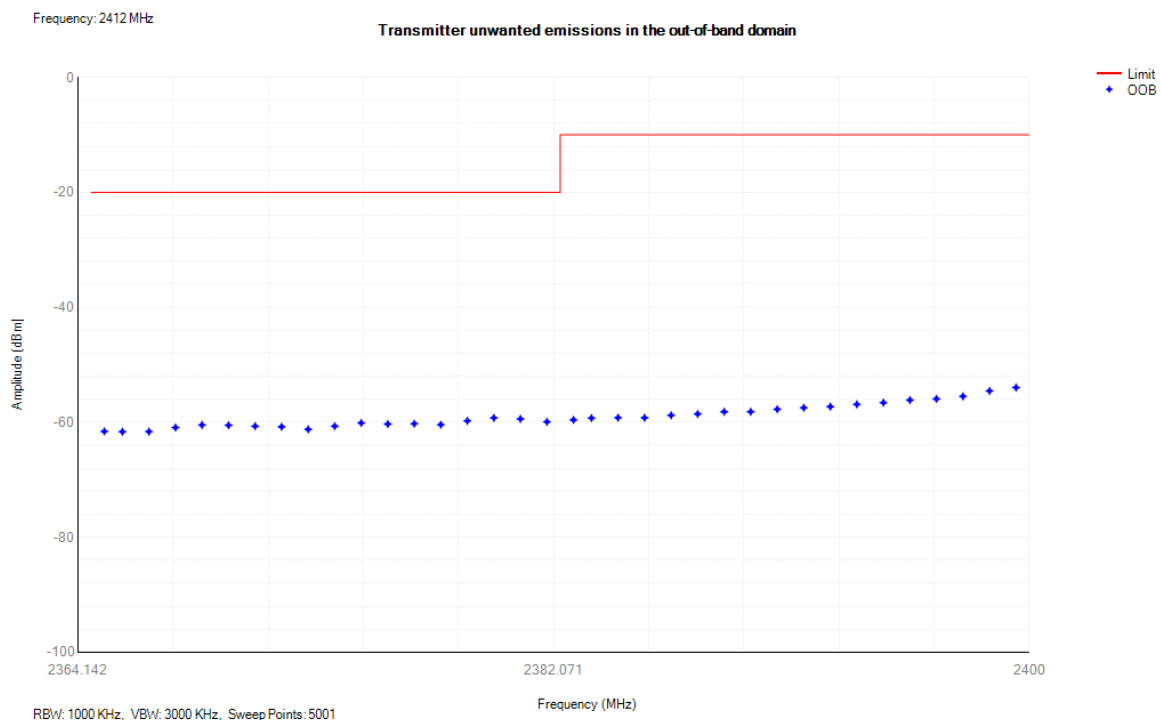


## Tx. Emissions OOB NVNT n20 2472MHz

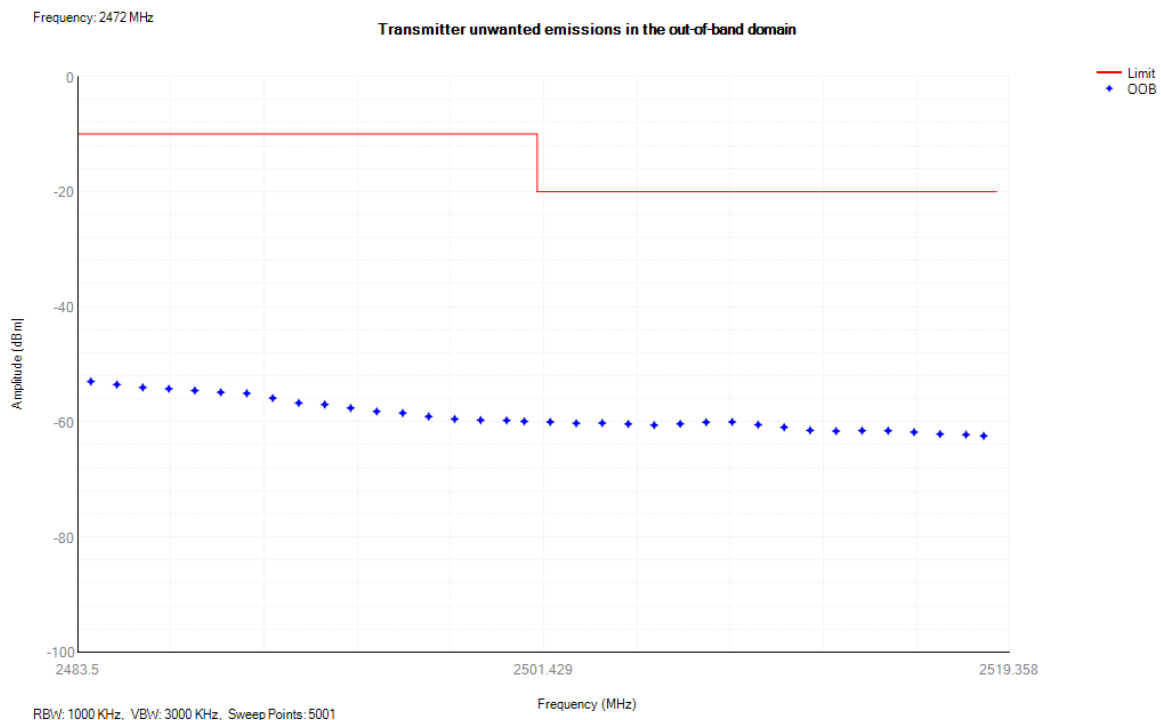

### Tx. Emissions OOB NVNT n40 2422MHz

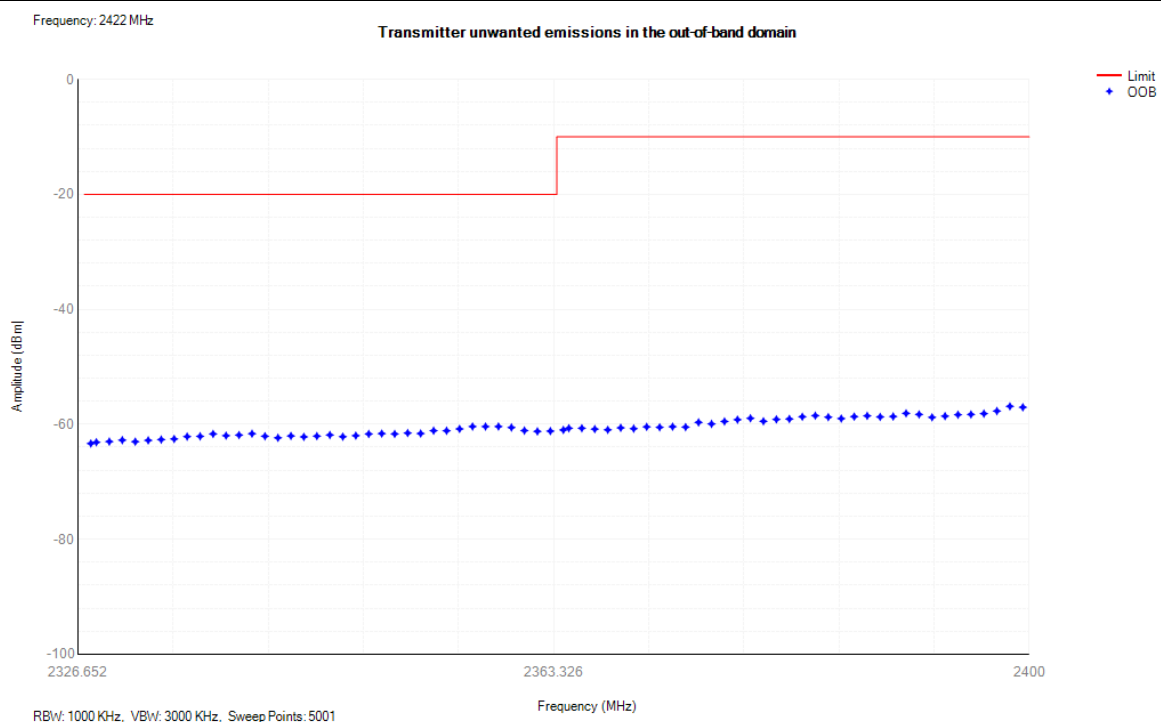


### Tx. Emissions OOB NVNT n40 2462MHz

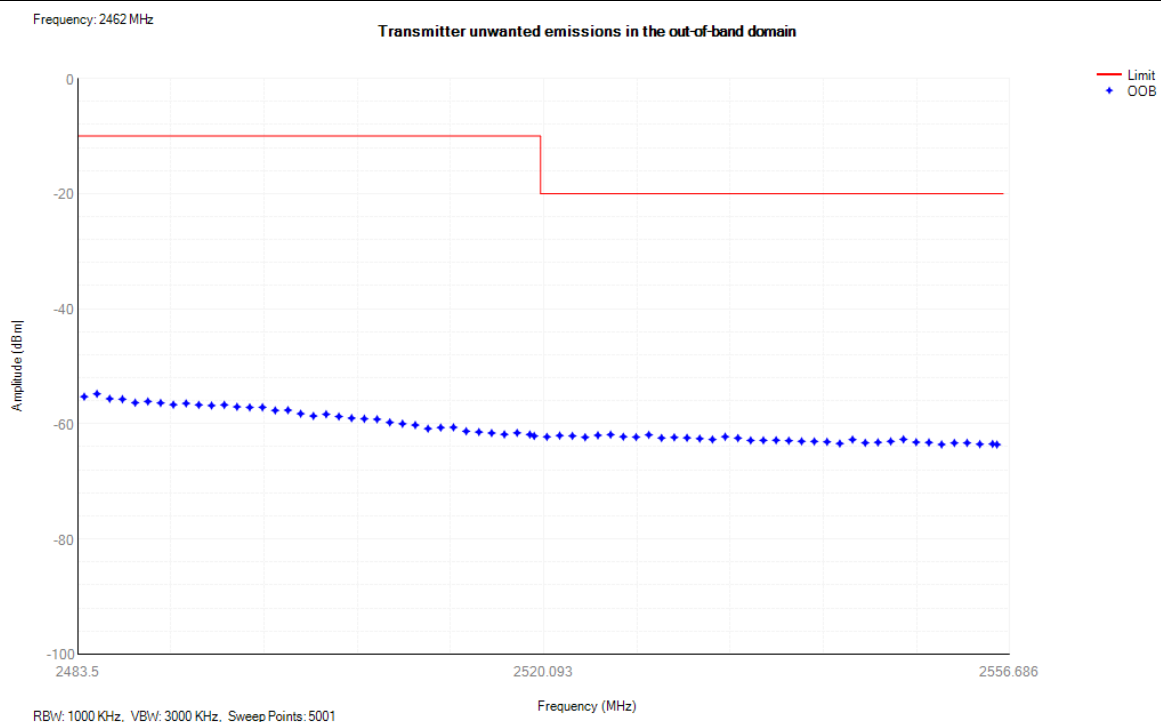





### Tx. Emissions OOB NVNT ax20 2412MHz

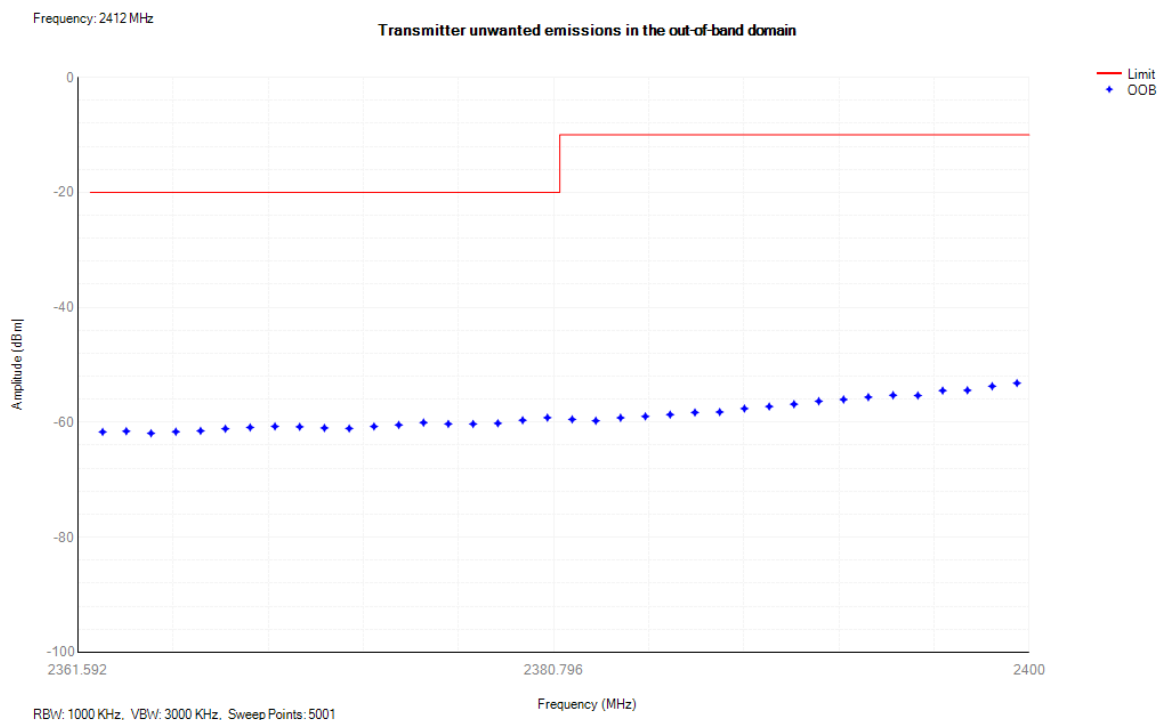


### Tx. Emissions OOB NVNT ax20 2472MHz

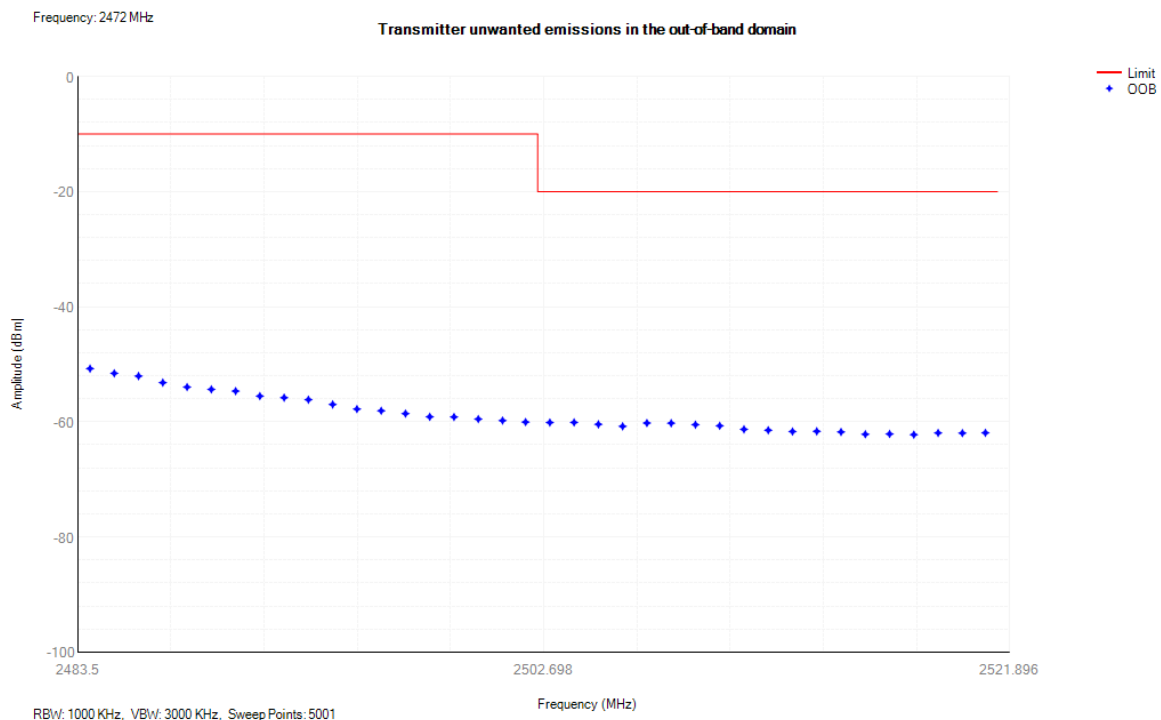

## Tx. Emissions OOB NVNT ax40 2422MHz

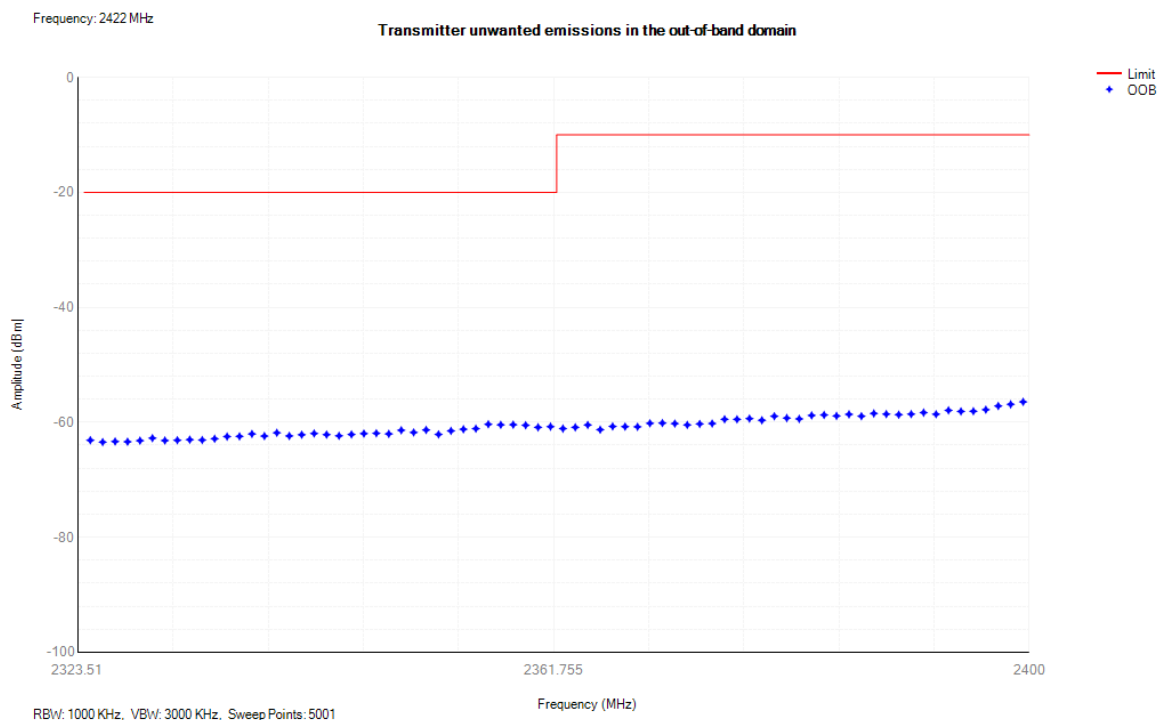

## Tx. Emissions OOB NVNT ax40 2462MHz

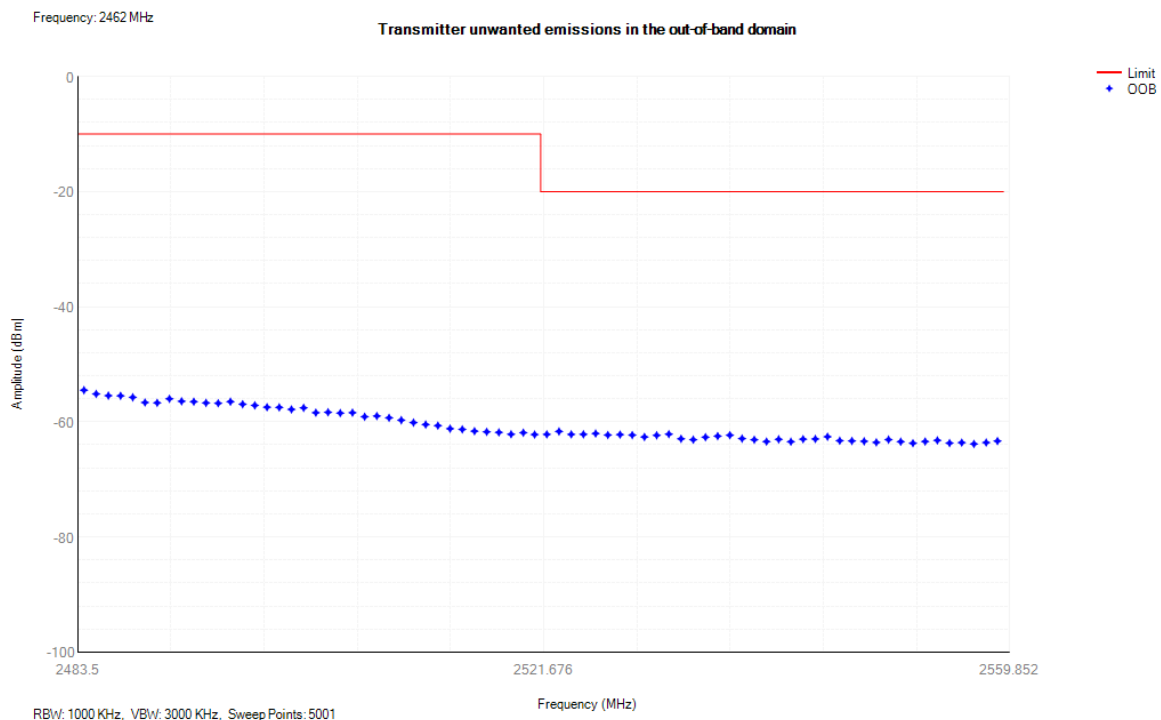


CO., LTD.


## 12. Transmitter Unwanted Emissions In The Spurious Domain

### 12.1 Block Diagram Of Test Setup

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

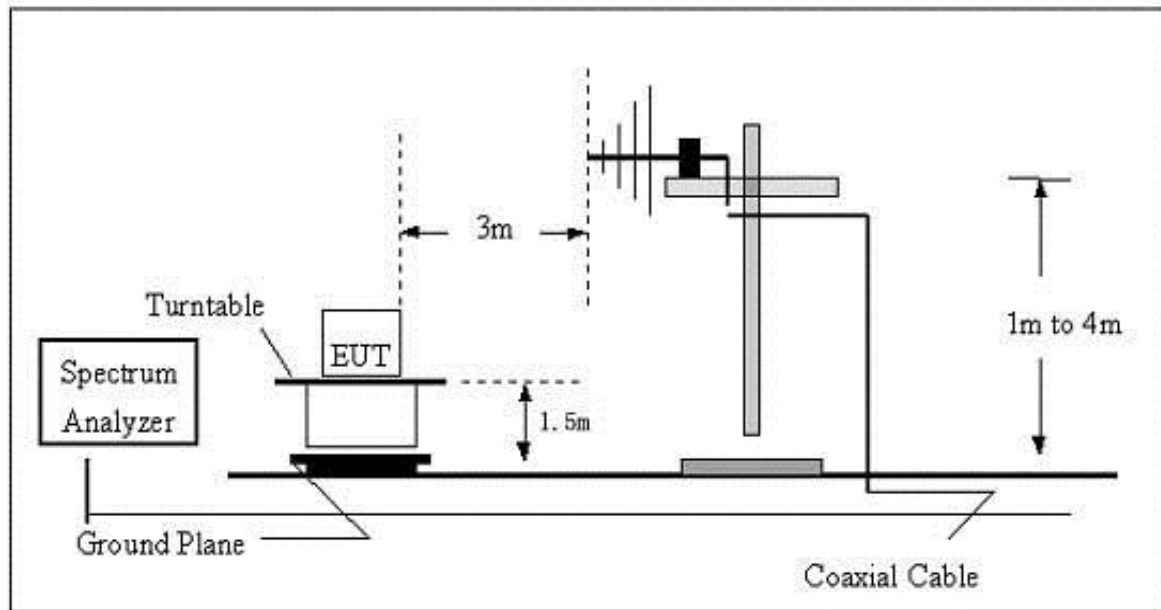

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

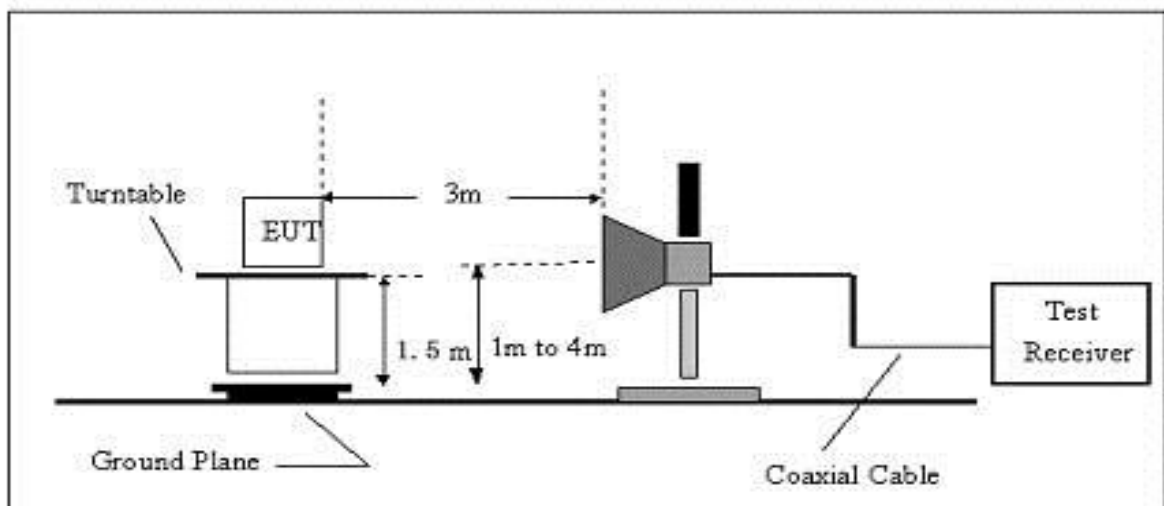

## 12.2 Limits

Frequency range	Maximum power, e.r.p. ( $\leq 1$ GHz) e.i.r.p. ( $> 1$ GHz)	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz

## 12.3 Test Procedure

### 30MHz ~ 1GHz:

- The Product was placed on the nonconductive turntable 1.5m above the ground in a full anechoic chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

### Above 1GHz:

- The Product was placed on the non-conductive turntable 1.5 m above the ground in a full anechoic chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

## 12.4 Test Results

All modes have been tested and reports show data in the worst mode

Test Mode: 802.11g (ANT A)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Correct Factor	Absolute Level	Result	
			Height	Polar			Limit	Margin
(MHz)	(dBm)	Degree	(m)	(H/V)	(dB)	(dBm)	(dBm)	(dB)
802.11g low channel								
555.18	-34.35	61	1.9	H	-27.94	-62.29	-54	-8.29
555.18	-35.02	291	1.5	V	-27.94	-62.96	-54	-8.96
4824.00	-28.21	154	1.1	H	-19.95	-48.16	-30	-18.16
4824.00	-26.99	11	1.2	V	-19.95	-46.94	-30	-16.94
7236.00	-39.61	242	1.3	H	-14.14	-53.75	-30	-23.75
7236.00	-40.26	85	2.0	V	-14.14	-54.40	-30	-24.40
802.11g Mid channel								
555.18	-34.21	343	1.3	H	-27.94	-62.15	-54	-8.15
555.18	-35.70	115	1.9	V	-27.94	-63.65	-54	-9.65
4884.00	-28.00	293	1.6	H	-19.83	-47.83	-30	-17.83
4884.00	-27.55	277	2.0	V	-19.83	-47.38	-30	-17.38
7326.00	-40.56	302	1.4	H	-13.89	-54.45	-30	-24.45
7326.00	-40.78	191	1.2	V	-13.89	-54.67	-30	-24.67
802.11g high channel								
555.18	-33.80	216	2.0	H	-27.94	-61.75	-54	-7.75
555.18	-35.03	22	1.1	V	-27.94	-62.97	-54	-8.97
4944.00	-28.12	358	1.2	H	-19.71	-47.83	-30	-17.83
4944.00	-27.72	237	1.8	V	-19.71	-47.43	-30	-17.43
7416.00	-39.99	147	1.9	H	-13.64	-53.63	-30	-23.63
7416.00	-41.23	11	2.0	V	-13.64	-54.87	-30	-24.87

Remark:


Absolute Level = Receiver Reading + Factor

Factor = Antenna Factor + Cable Loss – Pre-amplifier.


## 13. Receiver Spurious Emissions

### 13.1 Block Diagram Of Test Setup

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

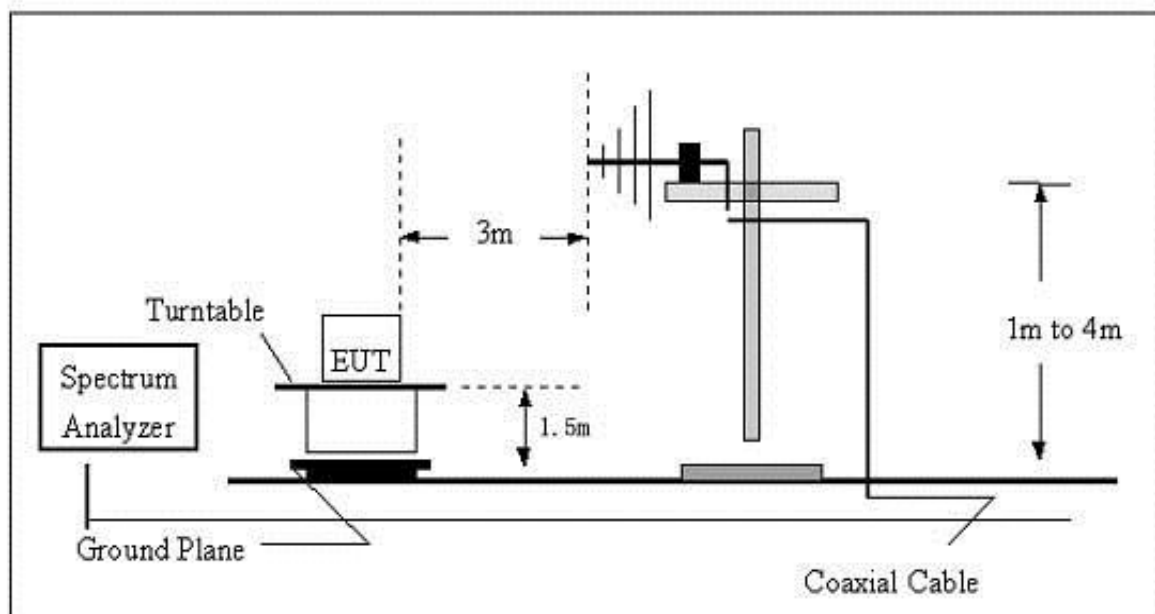

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

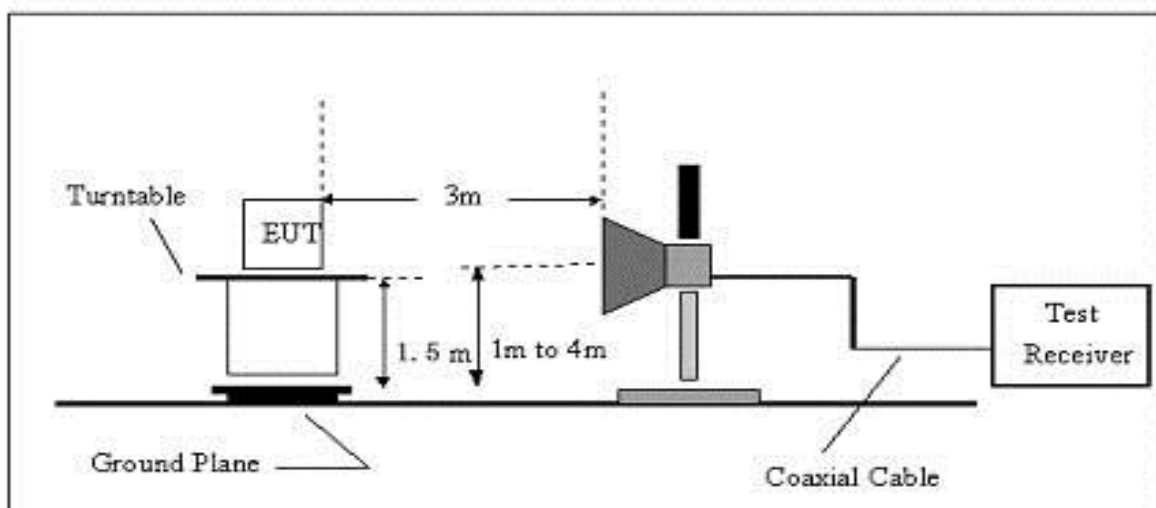



### 13.2 Limits

Frequency(MHz)	Limit	Bandwidth
30-1000	-57dBm	100 kHz
1000-12750	-47dBm	1 MHz

### 13.3 Test Procedure

#### 30MHz ~ 1GHz:

- The Product was placed on the nonconductive turntable 1.5m above the ground in a full anechoic chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

#### Above 1GHz:

- The Product was placed on the non-conductive turntable 1.5 m above the ground in a full anechoic chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.



### 13.4 Test Results

All modes have been tested and reports show data in the worst mode

Test Mode: 802.11g (ANT A)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Correct Factor	Absolute Level	Result	
			Height	Polar			Limit	Margin
(MHz)	(dBm)	Degree	(m)	(H/V)	(dB)	(dBm)	(dBm)	(dB)
802.11g low channel								
406.23	-37.83	40	1.5	H	-28.57	-66.40	-57.00	-9.40
406.23	-35.83	233	1.0	V	-28.57	-64.40	-57.00	-7.40
3137.14	-37.63	247	1.2	H	-23.33	-60.96	-47.00	-13.96
3137.14	-39.52	282	1.0	V	-23.33	-62.84	-47.00	-15.84
802.11g Mid channel								
406.23	-38.26	120	1.3	H	-28.57	-66.83	-57.00	-9.83
406.23	-36.71	327	1.3	V	-28.57	-65.28	-57.00	-8.28
3137.14	-37.41	231	1.1	H	-23.33	-60.74	-47.00	-13.74
3137.14	-39.71	23	1.8	V	-23.33	-63.04	-47.00	-16.04
802.11g high channel								
406.23	-38.13	291	1.2	H	-28.57	-66.70	-57.00	-9.70
406.23	-35.45	231	1.4	V	-28.57	-64.03	-57.00	-7.03
3137.14	-37.51	56	1.6	H	-23.33	-60.84	-47.00	-13.84
3137.14	-40.49	325	1.5	V	-23.33	-63.82	-47.00	-16.82

Remark:


Absolute Level = Receiver Reading + Factor

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CO. LTD

## 14. Receiver Blocking

### 14.1 Block Diagram Of Test Setup

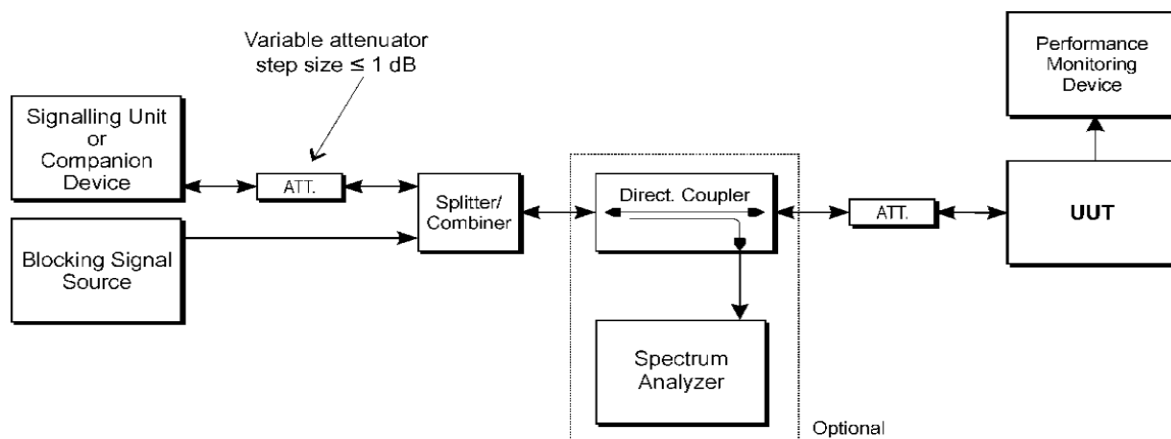

### 14.2 Limit

**Table 6: Receiver Blocking parameters for Receiver Category 1 equipment**

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + 10 × log <sub>10</sub> (OCBW)) or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
(-139 dBm + 10 × log <sub>10</sub> (OCBW)) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674		
NOTE 1: OCBW is in Hz.			
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P <sub>min</sub> + 26 dB where P <sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P <sub>min</sub> + 20 dB where P <sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

### 14.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.11.2.

### 14.4 Test Result

All modes have been tested and reports show data in the worst mode  
Test Mode: 802.11ax40 (ANT A)


Receiver Category 1					
802.11AX 40	P <sub>min</sub> (dBm)	Blocking Frequency (MHz)	Blocking Power(dBm)	Measured PER(%)	Limit (%)
2412	-68	2380	-34	3.22	10
2412	-74	2300	-34	4.95	10
2412	-74	2330	-34	5.86	10
2412	-74	2360	-34	2.51	10
2472	-68	2504	-34	4.32	10
2472	-74	2524	-34	2.79	10
2472	-74	2584	-34	4.45	10
2472	-74	2674	-34	6.90	10
Note: This report only shows the worst case test data. OCBW=38022000Hz (-133dBm+10*log10(OCBW))=-57.20dBm -68dBm≤-57.20dBm Wanted Signal Power=-68dBm (-139dBm+10*log10(OCBW))=-63.20dBm -74dBm≤-63.20dBm Wanted Signal Power=-74dBm					

SHENZHEN




## 15. EUT Photographs

EUT Photo 1

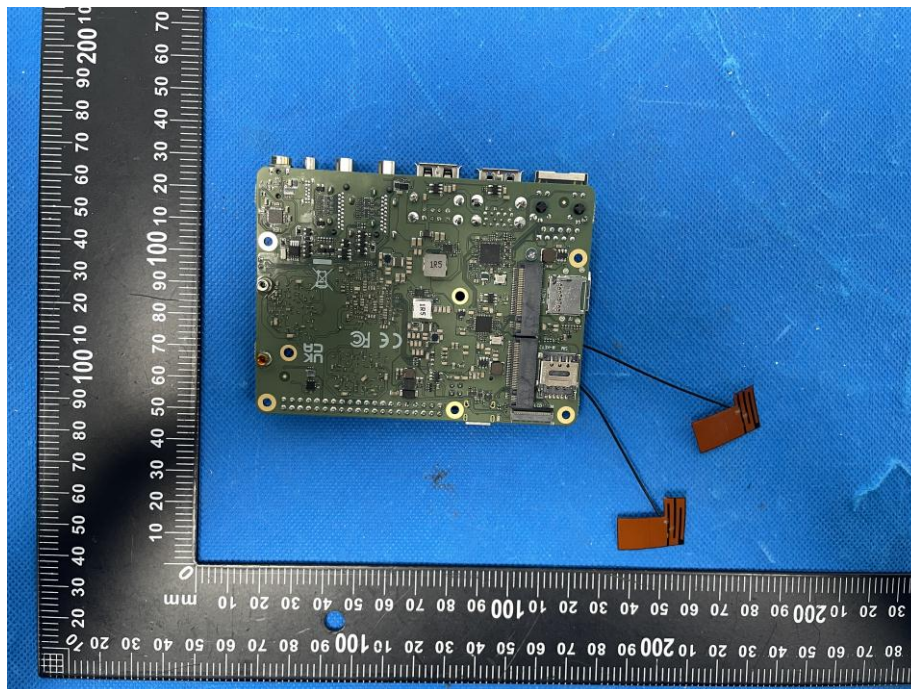


EUT Photo 2

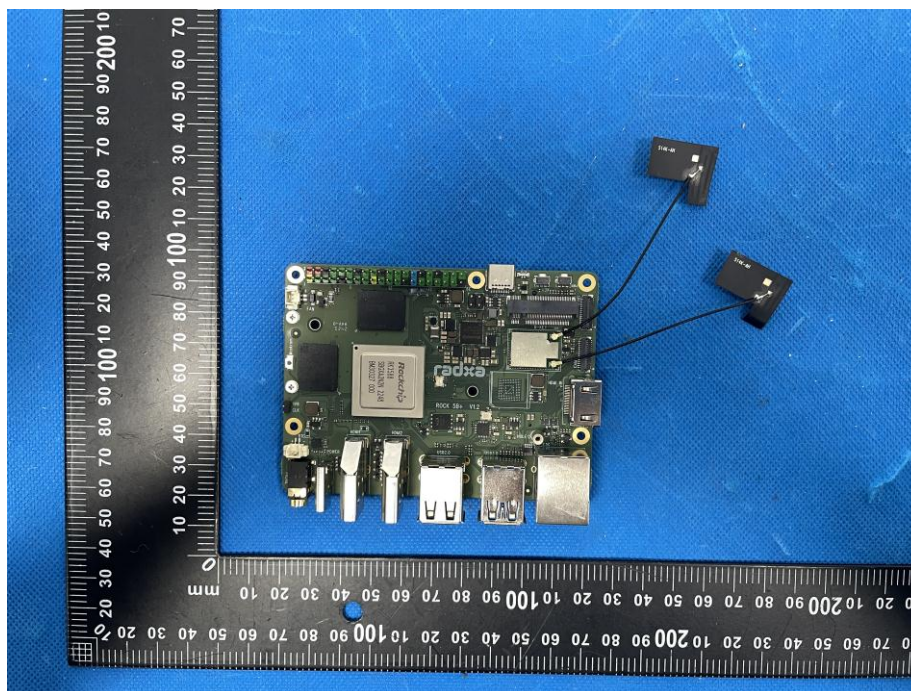




EUT Photo 3

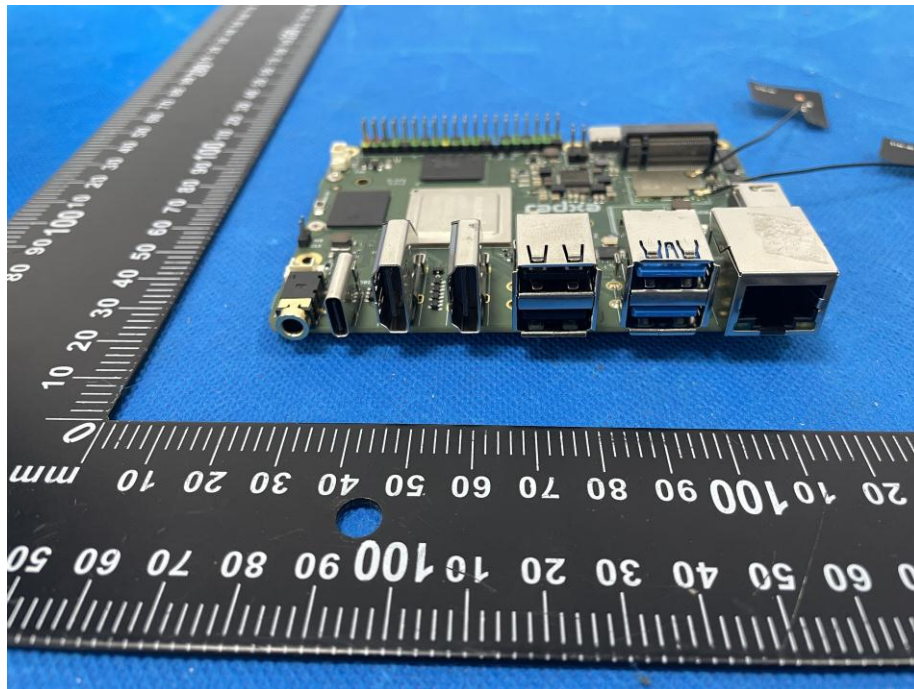


EUT Photo 4

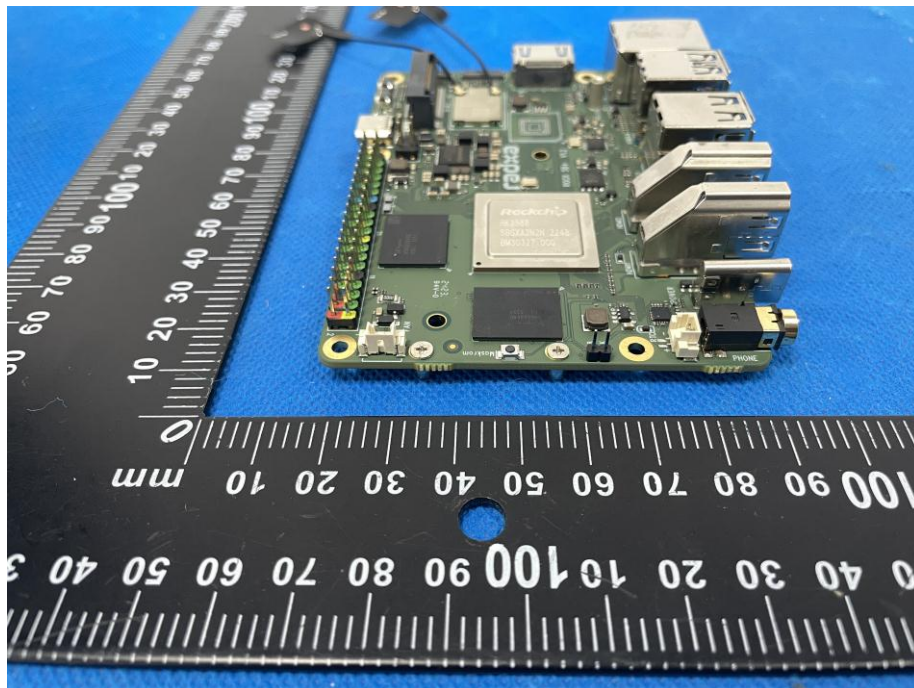




EUT Photo 5

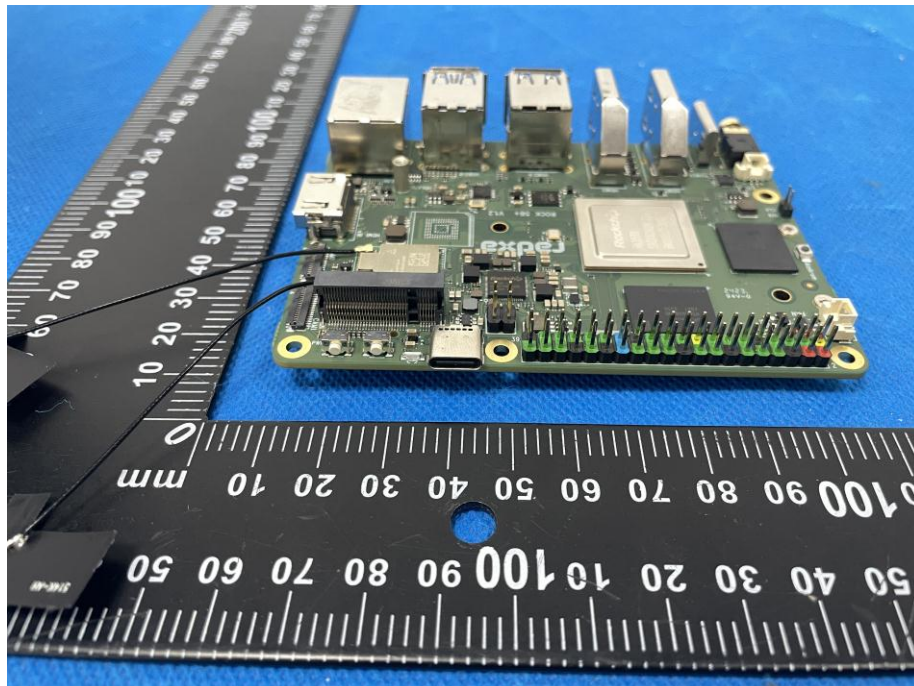


EUT Photo 6

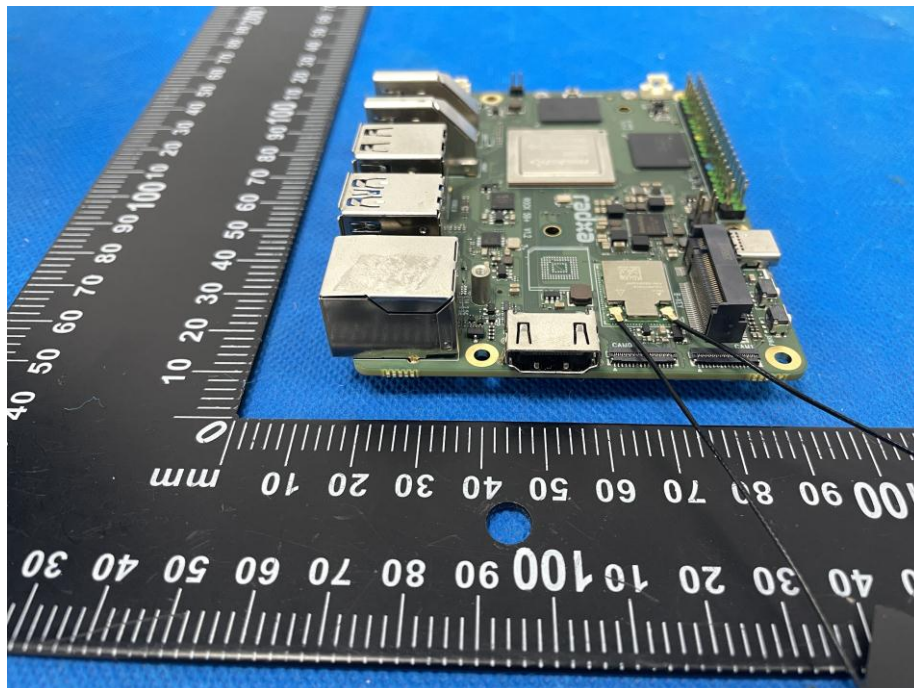





EUT Photo 7

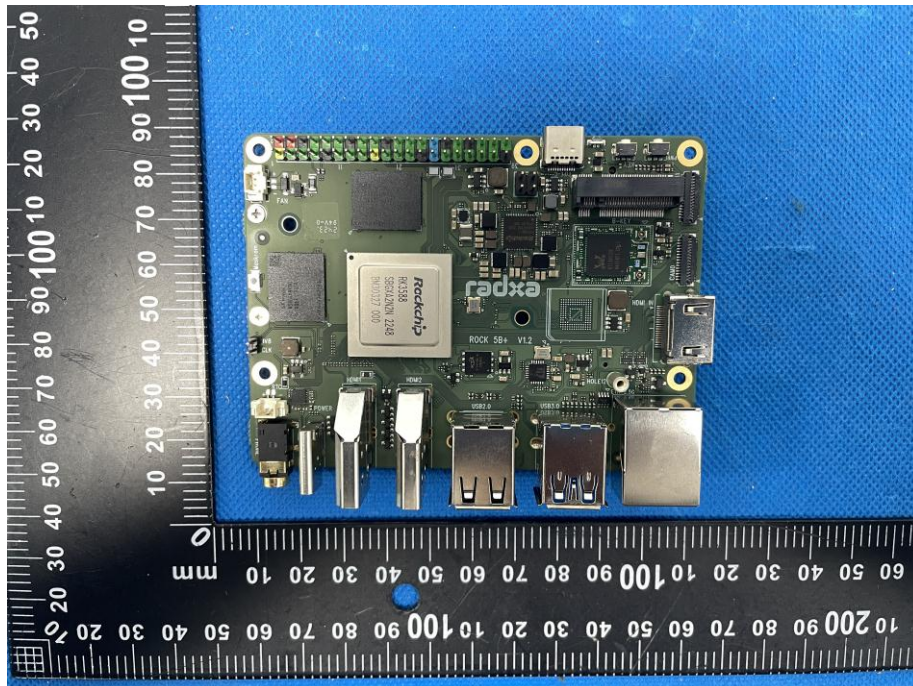

EUT Photo 8

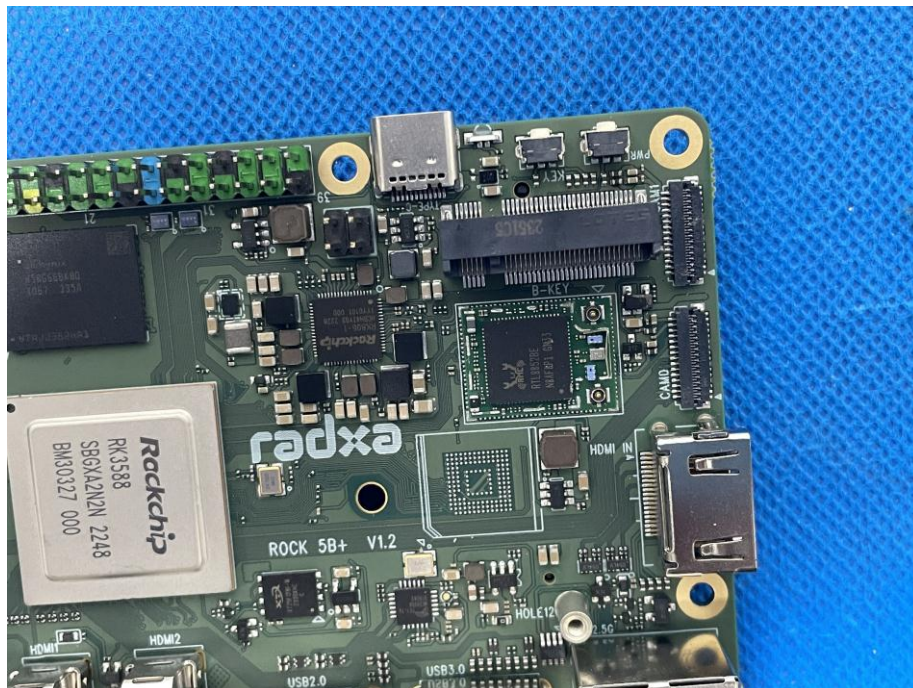

EUT Photo 9

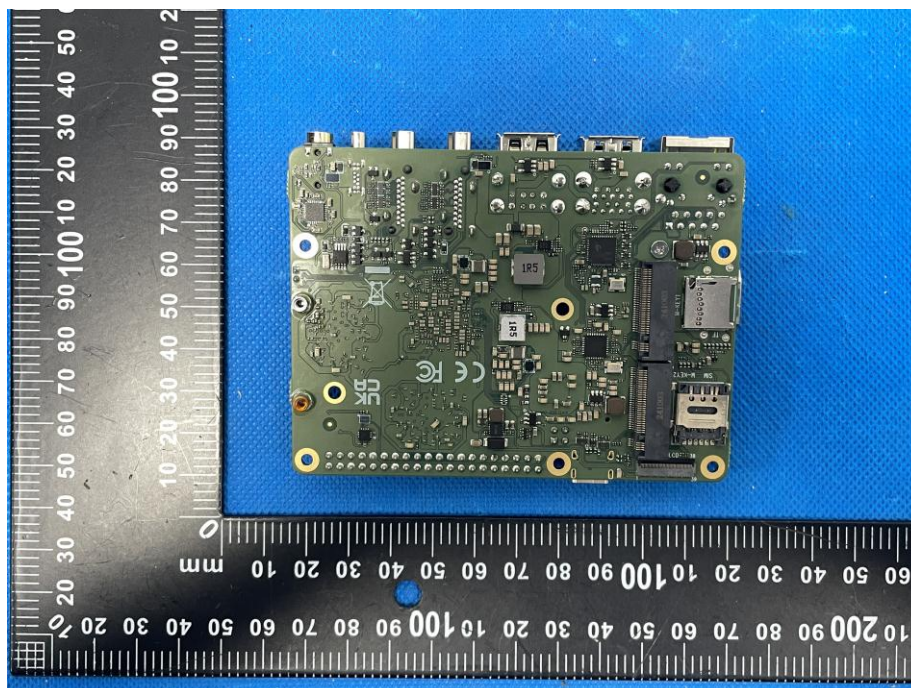

ST  
ED  
al



## 16. EUT Test Setup Photographs

Spurious emissions



## STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

Complaint/Advice E-mail: [advice@bctc-lab.com.cn](mailto:advice@bctc-lab.com.cn)

\*\*\*\*\* END \*\*\*\*\*

2017